

05/25/00



JC784 U.S. PTO

05-30-00

7

Please type a plus sign (+) inside this box → ☐PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

0004-0017

Total Pages

51

First Named Inventor or Application Identifier

Petrovic, Branislav

Express Mail Label No.

EK174399628US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification [Total Pages **33**]
(preferred arrangement set forth below)

- Descriptive title of the invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the invention
- Brief Summary of the invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 USC 113) [Total Sheets **16**]4. Oath or Declaration [Total Pages ☐

- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b,
is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

- 6. ☐ Microfiche Computer Program (Appendix)
- 7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- 8. ☐ Assignment Papers (cover sheet & document(s))
- 9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
- 10. ☐ English Translation Document (if applicable)
- 11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
- 12. ☐ Preliminary Amendment
- 13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
- 14. ☐ Small Entity ☐ Statement filed in prior application,
Statement(s) Status still proper and desired
- 15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
- 16. ☐ Other:

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____ / _____**18. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

NAME

Law Office of
Robert C. Strawbrich

ADDRESS

1303 Daytona Drive

CITY

Austin

STATE

TX

ZIP CODE

78733

COUNTRY

USA

TELEPHONE

(512) 263-8169

FAX

(512) 263-8168

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

RATIONAL FREQUENCY SYNTHESIZERS

5

10

Inventor(s): **Branislav Petrovic**
 Max Ashkenasi

15

Authored by: Robert C. Strawbrich
 1303 Daytona Drive
 Austin, TX 78733
 (512) 263-8169
 (512) 263-8168 (FAX)
 email: rcstrawbrich@prodigy.net

20

25

Express Mail Information

Express Mail Label No. EK174399628US

Date of Deposit: May 25, 2000

RATIONAL FREQUENCY SYNTHESIZERS

5 BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

This invention relates to a new class of phase lock loop (PLL) frequency synthesizers
10 utilizing very high reference clock frequency (in the order of 100 MHz, but not limited to)
and very high comparison frequencies (of the same order as the reference clock frequency),
but providing fine frequency resolution, where frequency steps increments can be orders of
magnitude smaller (in the order of 10 kHz, but not limited to) than the comparison
frequency, and especially to their use as single loop PLL frequency synthesizers having very
15 low phase noise, thus offering significant performance improvements for advantageous
applications such as cable television (CATV), high speed digital communications (digital
TV and high speed cable data modems for internet applications), wireless communications
and other consumer and commercial electronics devices in high frequency (HF), very high
frequency (VHF) and ultra high frequency (UHF) bands and beyond, but which are simple
20 and inexpensive to manufacture, and suitable for integration into modern integrated circuits,
as a single-chip solution. In addition, this invention relates to the field of precision phase
control of carriers in coherent multi-carrier transmission systems.

2. BACKGROUND OF THE RELATED ART

25 Modern communication and other electronics systems often require generation of internal
signals necessary for various processing functions, ranging from local oscillator sources for
signal frequency up or down conversion or modulation/demodulation purposes, to various
clock signals used by processors and controllers. Although the requirements regarding the
30 quality and speed at which these signals are generated highly depend on the specific

application, in general it is desirable, and often required to generate signals of high spectral purity, and in the case of commonly used frequency agile systems in communications, the tuning speed at which the channel frequencies can be dynamically change may be important as well. As is well known in the art, it is the goal of frequency synthesizers to accomplish the above tasks. It is therefore a general requirement for synthesizers to be able, by using reference signal or signals, to generate spectrally clean signals (or stabilize other signals) at required frequencies, having spectral purity, phase noise and tuning speed characteristics that are consistent with the system and application requirements. Furthermore, it is the synthesizers that are often called upon to reject (i.e. attenuate) undesired components that may accompany a signal that is being synthesized, stabilized or synchronized. An example of such a case is when a synthesizer is used to reduce the relatively high close-in phase noise inherently present in voltage controlled oscillators (VCO). In addition, it is often desired, if not required that the synthesizer can perform (or assist in) phase or frequency modulation or demodulation. In specific applications utilizing large number of coherent carriers carried over various mediums, such as in fiber optic links and coaxial cable distribution plant used in cable television, precision phase control of the carriers may be desired for the purpose of improving distortion performance of the transmission system, and in such cases it would be advantageous if frequency synthesizer could accomplish the carrier phase control function as well.

In modern communication systems deploying phase or frequency modulation, such as quadrature amplitude modulation (QAM) used in digital cable TV and high speed data modems, quadrature phase modulation (QPSK) used in digital cellular telephony, FM modulation used in analog cellular telephony, and many other communication systems employing similar modulation formats, it is the phase noise performance of the synthesized signals that is becoming increasingly important with a specific reason to preserve system performance and prevent degradation. As is well known in the art, excessive phase noise of the sources used to process modulated signals that contain information in it's phase or frequency can cause degradation in signal to noise ratio (S/N) or bit error rate (BER) of the desired signal, resulting in reduced sensitivity and unsatisfactory system performance. This is particularly true in the systems utilizing narrow band transmission, such as lower

deviation FM or lower symbol rate QPSK systems, where phase noise of local oscillators (LO) used to down convert RF signals to IF frequencies, or vice versa, is effectively added to the demodulated signal carrying information, thus directly degrading the S/N or BER. In the systems with closely spaced channels, it is also possible that the LO phase noise can cause degradation in sensitivity due to adjacent channel interference, whereby the LO phase noise side bands can in the receiver down-convert the adjacent channel and place it directly on the desired signal and so cause interference, or in the case of a transmitter LO, the transmitted LO phase noise side band occurring at the adjacent channel frequency can cause direct interference in the receivers tuned to that adjacent channel frequency.

When discussing the phase noise, it is important to note that phase noise is random in nature, having continuous spectral distribution around the synthesized signal. It should be distinguished from discrete undesired sidebands that may also exist as various spurious components in the vicinity of the signal. As is well known in the art, the discrete spurious sidebands of the synthesized signal are none less important than the random phase noise sidebands, since they can cause similar, and in many cases even worse undesired effects. The burden is usually on the synthesizer to ensure that all the above requirements are met, emphasizing that the spectral purity and phase noise requirements are most often the governing factor in the system design and implementation choices. Finally, it is always desirable that the above functions are realized in an inexpensive, repeatable and easily manufacturable way.

There are two well known general techniques for implementing frequency synthesizers - direct synthesis and indirect synthesis methods. Various forms of the combination of these two techniques are also well known in the art. The direct methods include direct analog synthesis (DAS) and direct digital synthesis (DDS). The indirect methods primarily rely on utilization of phase lock loops (PLL).

The direct analog synthesis method generates the desired output frequency or frequencies by the combination of such means as analog up/down conversion, multiplication, filtering and

attenuation/amplification of one or more reference signals. Frequency division may also be utilized, whereby digital dividers are primarily used.

The direct digital synthesis utilizes a sampled process, where digital words representing
 5 desired waveforms are computed and converted with the aid of a sampling clock to a desired analog signal in digital to analog converter followed by antialiasing filter.

The indirect synthesis technique utilizes a method where one oscillator (in single loop PLLs) or more oscillators (in multiple loop PLLs) are forced in a controlled way to be phase (and
 10 frequency) locked to one or more reference signals. While the phase locked loops are most commonly used to accomplish this task, other means, such as injection-locked oscillators (also known as synchronous oscillators) may also be used for this function.

Each of the above techniques has its advantages and disadvantages regarding frequency
 15 coverage, frequency agility and switching speed, phase noise and spurious sideband performance, power consumption, size, cost, manufacturability, repeatability etc. Many of these factors are contradictory in nature to each other, and it is the matter of intended application that will govern the considerations and choices as to which method or methods is the most suitable to use. Although the characteristics of each of the techniques regarding
 20 these factors are well known in the art, for the purpose of completeness of the discussion, the key characteristics for each of the methods is summarized below:

DAS - possibly the best spectral purity (phase noise, close-in spurs) and fastest switching time attainable, wide frequency coverage but limited frequency agility, larger size, higher
 25 complexity and cost, may require adjustments in manufacturing - in general not suitable for large volume, low cost applications.

DDS - very good noise and close-in spectral purity performance, fast switching with continuous phase capability, excellent agility but limited frequency coverage (currently at
 30 about 100 MHz practical implementation limit), medium to high cost (increases with

frequency), could be used in limited number of high volume applications.

PLL based frequency synthesizers- moderate to good noise and close-in spur performance, slow to medium switching speed, wide frequency coverage and agility (usually limited by VCO), lowest to medium cost, moderate to good repeatability, low power.

The single loop PLL based frequency synthesizers are by far the most widely utilized type in large volume communications systems applications, since in most cases they offer the best compromise of all of the above competing factors (i.e. low cost, simple construction with low parts count and low power consumption, acceptable performance levels). We will hereinafter in the background discussion focus on the single loop PLL type of synthesizers, with the emphasis on the shortcomings in the prior art of this type, as some of these shortcomings are the subjects being addressed by the present invention.

PLL synthesizers, as mentioned earlier, operate on the principle of phase locking an oscillator (or multiplicity of) to a reference signal (or signals). To simplify the following description, we will narrow the discussion (but not limit to) a case involving only one oscillator and one reference signal source.

In general, every PLL represents a closed loop negative feedback control system, where the controlling variable is the phase of the controlled element, and a controlled element is an oscillator with variable frequency capability, most often of the VCO type. Such a feedback system requires a mechanism to generate an error signal, upon comparing the controlling variable (oscillator's phase) with the equivalent parameter of the reference (reference's phase). This error signal is by the means of a loop filter converted into a control signal, which is in turn used to steer the oscillator in the direction that reduces the error signal towards zero or some finite value.

In a PLL, the error signal is generated by the phase comparator (phase detector). The phase detector compares the phase of the oscillator with that of the reference signal, and provides an error signal proportional to the phase difference. The error signal is further conditioned

by the loop filter. The loop filter usually consists of either a passive or active single or multiple pole filter, which may be followed with an amplifier, to produce a control signal. Applying this control signal from the output of the loop filter to the tuning line of the oscillator, closes the feedback loop, and completes the PLL circuit. However, before a phase lock can occur, a frequency lock must occur. During acquisition of phase lock, depending upon the amount of frequency difference between the reference and oscillator signals, the phase detector alone may not provide an adequate steering signal that will guide the frequency of the oscillator in the right direction, and for the purpose of assisting, or enabling acquisition, the so called phase-frequency detectors (PFD), or other means such as frequency pre-tuning or frequency sweeping are utilized. In the acquisition stage, the PFD (or above mentioned other means) provides a DC steering signal of the right polarity, consistent with the sense of the frequency difference, which guides the oscillator in the correct direction towards a lock.

The ability of the loop to correct any fluctuations of the phase that the oscillator may have depends upon a loop bandwidth (LBW) of the loop. Within the LBW, the loop will substantially eliminate (i.e. reject) any phase fluctuations (phase noise) that the oscillator itself may have, while the oscillator will “copy”, i.e. track the phase of the reference. It will also track any noise that falls within the LBW generated elsewhere in the loop (e.g. the noise of the phase detector). This noise is added to the phase noise of the reference signal. The loop will multiply this combined noise by a factor which equals to N_{tot} (total division ratio in the loop), and then phase modulate the VCO with this multiplied noise. As will be shown later, this noise multiplication is often the key factor causing degradation of phase noise performance in synthesizers.

Typically, the desired output frequency of the oscillator differs from that of the reference frequency. Furthermore, in agile systems the oscillator needs to be tunable to different frequencies at different times. For this purpose, some sort of programmable frequency scaling is required. This function is accomplished by the means of so called prescalers (either of a fixed or of a variable division ratio, or modulus) and programmable counters.

Since programmable counters have limitations in terms of the upper frequency limit where

they can operate, often prescalers are used to scale the oscillator frequency down and bring it within the operational frequency range of the programmable counters

Often it is necessary to scale down the reference frequency as well, so that the reference frequency is divided down to a lower frequency, referred to as a comparison frequency, which is the frequency at which the comparison of the phase (and frequency) of the scaled versions of both the oscillator and reference signals actually occurs. In the lock conditions, the scaled frequencies of the oscillator and reference signals are made equal by the PLL action, and the frequency relationships are expressed with the following equations:

$$f_{osc} = N_{tot} \cdot f_c \quad (1)$$

$$f_c = \frac{f_r}{R} \quad (2)$$

where f_{osc} is the oscillator output frequency and N_{tot} is the total division ratio of the oscillator signal, f_r is the reference frequency, R is the division ratio of the reference frequency, and f_c is the comparison frequency.

As is well documented in the literature related to the art, the primary cause of phase noise at the output of the synthesized oscillators is the combination of the residual VCO phase noise (the portion of the oscillator noise that is not rejected by the loop), and the noise power of the loop components (such as dividers and phase detectors). This loop noise is multiplied by the loop by a factor of N_{tot}^2 , or $20 \cdot \log(N_{tot})$. Any random noise and discrete spurs occurring at the output of the phase comparator within the LBW will be multiplied by this factor and then applied to the oscillator where the phase modulation of the oscillator by these signals will occur. Outside of the LBW, the loop will attenuate such signals according to the transfer function of the loop. In the case of relatively low comparison frequency f_c and relatively high oscillator frequency f_{osc} , the $20 \cdot \log(N_{tot})$ figure can amount to a very large quantity, exceeding the residual VCO phase noise and thus becoming a dominant and limiting factor in the ultimate noise performance achievable in the system.

One example of adverse effects of noise multiplication (or noise gain) in the loop is in the cable television systems, where channel frequency spacing is 6 MHz, but the channel carrier frequencies must be integer multiples of 12.5 kHz (in a standard frequency plan, most channel frequencies are multiples of 0.25 MHz, but due to regulatory requirements by Federal Communication Commission – FCC, a few channels must be offset from this frequency grid by 25 kHz, and some other channels by 12.5 kHz; furthermore, some cable TV systems use a frequency plan where all channels are offset by 12.5 kHz from a standard plan - the so called “incrementally related carriers” - IRC plan). To accommodate these channel frequency requirements, a comparison frequency of 12.5 kHz is required. For a local oscillator operating around 970 MHz in a cable head-end modulator, or in a set-top converter, the noise multiplication figure will amount to 98 dB. Another example of noise multiplication is in an oscillator, synthesized at about 900 MHz, with step size of 30 kHz, common in cellular telephony. This step size will demand a comparison frequency of 30 kHz, and the noise multiplication figure in this case will be close to 90 dB. The noise gain of this magnitude can place severe limitations as to the achievable phase noise performance in the system, such as in the above two examples.

By examination of equation (1) and (2), it becomes evident that the frequency step resolution, i.e. the minimum achievable frequency increment of the oscillator frequency is the function of both the comparison frequency f_c and the minimum available increment of the division ratio N_{tot} , as expressed in the following equation:

$$\Delta f_{osc} = f_{step} = \Delta N_{tot} \cdot f_c \quad (3)$$

where $\Delta f_{osc} = f_{step}$ is the minimum achievable frequency increment of the oscillator

frequency and ΔN_{tot} is the minimum available increment of the total divider count N_{tot} .

By examining equation (3), it becomes clear that if N_{tot} is an integer (and therefore having a minimum increment of $\Delta N_{tot} = 1$) the smallest achievable step size $\Delta f_{osc} = f_{step}$ is equal to f_c . Furthermore, from equation (1) it follows that N_{tot} being an integer also implies a required integer relationship between f_{osc} and f_c .

Another adverse effect of low comparison frequency indirectly affects the switching speed. It is well known in the art that the switching speed is inversely proportional to the loop bandwidth LBW. It is often the case that the LBW must be substantially lower than the comparison frequency, since the signals with the energy at the comparison frequency may occur in the loop, due to the leakage of this frequency from the phase comparator. To prevent phase modulation of the oscillator and resulting discrete sidebands of the oscillator, the loop must attenuate the undesired energy at f_c frequency, and to do so it may be necessary to reduce the loop bandwidth far below the f_c frequency. While reducing the LBW may eliminate the unwanted sidebands, it will also reduce the switching speed of the synthesizer. Reduced LBW may also reduce the rejection of the internal oscillator phase noise, which is otherwise eliminated by the loop. To address the switching speed, many synthesizer designs often include dynamically switched LBW - a wide one and a narrow one. The wide bandwidth is selected during acquisition stage to speed up the acquisition, upon which a narrow bandwidth is switched-in for normal operation. While in this way the switching speed is improved, the oscillator noise rejection remains poor with narrow LBW.

Another adverse effect associated with narrow LBW is related to phase modulation of the oscillator due to mechanical shock or vibration (referred to as microphonics). In general, mechanical vibration can cause parametric modulation of various components of a PLL (such as varactor diodes, inductors, etc.), which can result in phase modulation of the oscillator. The loop will reject the spectral energy of the mechanical vibration within the LBW, but outside the LBW, the loop will not be able to protect the oscillator of being phase modulated by the vibration. Therefore, wider loops are more resistant to shock and vibration, and narrower loops less.

Returning back to the discussion on the available types of PLL synthesizers, it is important to note that the solution for low cost, small size and low power consumption in modern, consumer type communications system relies on the ability to integrate the entire synthesizer, short of the oscillator, on a single integrated circuit, i.e. the application often

requires the so called single-chip solution. Some more advanced applications are demanding the integration of the oscillator, too, on the chip.

There are three types of the single loop PLL synthesizers presently used as a single-chip low cost solutions in the art, and they primarily differ from each other in the way the N_{tot} division ratio is accomplished. The three types are the following: the fixed modulus prescaler type, the dual modulus prescaler type and the fractional_N type PLL synthesizer.

The fixed modulus prescaler contains a fixed prescaler with division ratio P, where

$N_{tot} = P \cdot N$ and N is a programmable counter division ratio. Per equation (3), the minimum increment is limited to $P \cdot f_c$. As an example, if $P=10$ and step size is to be 30 kHz, the comparison frequency f_c needs to be as low as 3 kHz, which will cause an increase of noise gain in the loop by another 20 dB in the previous example. Clearly, the limitation of this type of the synthesizer only aggravates the issues discussed above, and in many applications it can not provide the satisfactory performance.

The dual modulus prescaler type offers a division ratio of $N_{tot} = N \cdot P + A$, such that the output frequency is defined by:

$$f_{osc} = (N \cdot P + A) \cdot f_c \quad (4)$$

The minimum increment with this type of synthesizer is equal to comparison frequency $\Delta f_{osc} = f_{step} = f_c$, since A is an integer which can be incremented by 1. This synthesizer operates on the principle of dual modulus prescaling, whereby the f_{osc} is first divided by (P+1) for A cycles of the divided signal, and then the modulus is switched to P, for subsequent (N-A) pulses of the divided waveform. The total pulse count in one full division cycle is therefore $A \cdot (P + 1) + (N - A) \cdot P = N \cdot P + A$. This type of synthesizer is widely used and presents the “work horse” of the industry.

The fractional_N type synthesizer (FNS) represents the current state of the art in the field of a single-chip PLL frequency synthesis. It is the only type that offers non-integer division

ratios, and therefore offers higher comparison frequency than the step size. Currently the available FNS integrated circuits offer sub-integer ratios of $\frac{1}{5}$ and $\frac{1}{8}$ allowing for output frequency increments equal to $\frac{f_c}{5}$ or $\frac{f_c}{8}$. The increased comparison frequency by a factor of 8 will reduce the noise multiplication figure by 18 dB, but nevertheless, the multiplication factor will still remain relatively high.

The FNS presents an augmentation of the dual modulus prescaler synthesizers. The capability to divide with non-integer numbers is effectively accomplished by varying the total division ratio as function of time, whereby the total division ratio is not held constant at N_{tot} , but rather it is dynamically changed in time from N_{tot} to $N_{tot} + 1$ and vice versa, in a controlled way, such that an average division ratio that is not an integer, but rather a fractional number is obtained. The principle of operation of fractional_N synthesizer can be better understood by referring to **Figure 1**, where a functional block diagram of an FNS is illustrated. As shown in this figure, the augmentation portion that is responsible for the extension of the regular dual modulus prescaler synthesizer into a fractional_N type synthesizer contains a phase accumulator with modulo M division ratio, a fraction register F and a compensation DAC. Modulo M phase accumulator counts pulses as they arrive from the N counter and effectively divides this pulse rate by a factor equal to M. Normally, the systems divides by $N_{tot} = N \cdot P + A$, in the same way as regular dual modulus type. However, every time the M counter reaches a value equal to F, which is a value preset by a fraction register F, the M counter issues one overflow pulse that sets the dual modulus prescaler to divide by (P+1) for one extra cycle of the divided signal, effectively increasing A to A+1. The system then starts dividing by $N_{tot} + 1 = N \cdot P + A + 1$, but only until the next pulse from the N counter, which restores the divide by (P+1) cycle back to A, at which time the system switches back to normal division rate of $N \cdot P + A$. The system continues to count at this normal rate until the next overflow pulse from the M counter, when it switches to $N_{tot} + 1$ rate, and the whole cycle repeats again.

The output frequency of fractional_N synthesizer is given by:

$$f_{osc} = (N \cdot P + A + \frac{F}{M}) \cdot f_c \quad (5)$$

where M is the modulus of the phase accumulator and F is the fraction register value. The frequency increments of $\Delta f_{osc} = f_{step} = \frac{f_c}{M}$ are available. Varying F from 0 to M-1, contiguous steps are possible.

5

Examining the division rate as a function of time, it becomes clear that only the average frequency at the output of the programmable N counter equals that of the comparison frequency, while the instantaneous frequency (i.e. the instantaneous pulse rate at the N counter output) is never equal to the comparison frequency f_c , which has a constant,

10

uniform pulse rate. The N counter output pulse rate alternates in time between the two

values, one equal to $\frac{f_{osc}}{(N_{tot} + 1)}$ and the other to $\frac{f_{osc}}{N_{tot}}$. The phase/frequency

detector PFD sees on one side a uniform pulse rate f_c coming from the reference divider R, and on the other side a variable frequency coming from the N counter. Since these two rates are never the same, the phase detector at the end of each comparison cycle always issues an error signal, equal to the phase discrepancy of the two signals at the end of that comparison

15

cycle. This error signal needs to be completely removed from the loop, otherwise severe phase modulation of the oscillator would occur (it can be shown that the accumulated phase error in one complete fractional cycle amounts to 360° at the oscillator frequency). The removal of the phase error signal is accomplished by the means of the compensation DAC

20

which injects correction signals directly into the loop. On a cycle by cycle basis, the phase error is substantially predictable and it can be precisely determined as a function of count state of the M counter. The compensation DAC can therefore be directly driven by the M counter. At each comparison cycle the DAC generates a precise charge matched to the instantaneous phase error and attempts to cancel this phase error. The required precision of

25

the correction charge is substantial. As an example, for 60 dB sideband purity of the oscillator, matching of the correction pulses and phase error in the order of 0.1 % is required. Although it is achievable in the state of the art FNS ICs, it is often difficult to maintain this kind of precision over wide frequency range and temperature range since both

the compensation DAC and PFD will exhibit some variations due to these factors. This is primarily due to the effect of temperature on propagation delays within the IC in the PFD, as well as effects of both the frequency and temperature on the current sources used in the compensation DACs. For wide tuning range oscillators, it is often necessary to provide an external adjustment for the compensation current of the DACs in the application circuit (outside of the IC), which may complicate the manufacturing process. Due to these factors, the ultimate phase error compensation is limited, and to ensure sufficient spectral purity of the oscillator, the loop filter often must be called upon to assist in further reduction of the sidebands, resulting in the LBW having a cut-off much below the f_c/M , i.e. much below

the step increment frequency. The reduced LBW, as mentioned earlier may adversely affect both the switching speed and the rejection of the internal oscillator phase noise. There are efforts in the art of fractional_N synthesis to improve phase error correction methods and alleviate some of the problems discussed above. More advanced approaches include utilization of higher order sigma-delta modulators in the role of a compensation DAC, which should push the phase error energy out of the loop bandwidth, towards higher frequencies by proper noise shaping of the correction pulses.

Finally, it should be mentioned that all of the above discussed prior art synthesizers use a phase-frequency detector which is inherently limited in speed. The type of the PFD used in the prior art relies on flip-flops with reset line fed back from the output. The propagation delay and set-up and hold times of this circuit limits the maximum speed (or frequency) of the PFD operation. Further more, in phase lock condition, there is a well known phenomena called a "dead zone". This is a point where phase detector gain goes to zero, which can cause instability in the loop, resulting in random phase fluctuation (low frequency phase noise) of the oscillator.

Thus, those of skill in the art will recognize the need for an alternative solution in the PLL frequency synthesis, one that can operate at much higher comparison frequencies, thus substantially improving phase noise performance, and at the same time providing fine

frequency step increments of the output oscillator frequency.

SUMMARY OF THE INVENTION

5

It is therefore an objective of the present invention to provide a single loop PLL frequency synthesizer which uses very high reference clock frequency (in the order of 100 MHz, consistent with the current state of the art of the integrated circuits technology, but inherently not limited to this operating frequency) and operates at very high comparison frequencies (of the same order as the reference clock frequency) thus substantially reducing the total division ratio N_{tot} , and therefore proportionally reducing the noise multiplication factor in the loop, resulting in improved phase noise of synthesized signals.

10

15

It is another objective of the present invention for the synthesizer to, concurrently with the first objective allow for fine frequency resolution increments of the output oscillator frequency (in the order of 10kHz, but inherently not limited to this order), i.e. orders of magnitude smaller than the comparison frequency.

20

It is yet another objective of the present invention to utilize high speed digital XOR gates, operated in a single sideband (SSB) mode as the means for phase comparison, thus further reducing the noise levels in the loop and freeing the loop of the "dead zone" effects.

25

This, and other objectives in the present invention are achieved by the means of frequency translation (or frequency conversion) combined with frequency division (combination of frequency translation and division is referred hereinafter as the process of "Frequency Ratio Generation") of the reference frequency and/or of the oscillator frequency, through multiple consecutive up or down conversions of these frequencies, using SSB mixers (where either the upper sideband - USB, or the lower sideband - LSB is selected by the frequency control means), in combination with programmable frequency dividers or counters, where the converted and/or divided frequencies are compared in a phase detector, followed by a loop

30

filter in a closed loop manner that provides phase locking of the oscillator.

It is another objective of the invention to, by internal waveforms synthesis, mathematical algorithms, computation, analysis and by other means in the design process determine and
 5 choose the optimum fractional expansions representing the ratio of oscillator and reference frequency, for each and every synthesized frequency, and so obtain the bases for the hardware implementation and design, where the computation in the design stage includes the spectral purity analysis of each and every frequency, using such means as computation of time domain waveforms and division of, Fast Fourier Transform (FFT), inverse FFT and
 10 other means, with the goal to choose the optimum or minimum hardware configuration of the synthesizer, one which meets the criteria of best spectral purity in the frequency range of interest (usually in the vicinity of the LBW), such as to minimize the spectral energy occurring at frequencies equal to step frequency f_{step} and it's harmonics, so that the loop bandwidth of the synthesizer's PLL can be maximized, possibly to values greater than the
 15 frequency of the step size increment.

It is yet another objective of the invention to develop and implement frequency control algorithms and store all necessary instructions and values in non-volatile memory for on-board controller or micro-processor, in order to generate necessary frequency control signals
 20 for the synthesizer's hardware.

It is further objective in the present invention to utilize the bi-level (digital) circuits to accomplish all functions, or, in the cases where it is not feasible due to the speed (frequency) limitations in the current state of the art digital integrated circuit technology, use the
 25 combination of analog, radio frequency (RF) and digital circuits in one embodiment of the invention, where analog functions can be implemented by using standard analog/RF integrated circuits, and digital functions can be implemented in either standard Field Programmable Gate Arrays (FPGA) or custom Application Specific Integrated Circuit (ASIC).

It is another objective to embody the present invention in a form suitable for integration on a single chip integrated circuit, with minimum required support circuitry, either digital-only IC, or mixed analog/digital IC.

- 5 It is yet another objective of the present invention to provide a PLL frequency synthesizer capable of supplying an oscillator signal with precisely controlled phase and ability to control (increment/decrement) the phase in fine steps.

10 These and other objectives will be clear to those of skill in the art in view of the detailed description of the invention.

15 **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is an illustration of a functional block diagram of a fractional_N type frequency synthesizer of the prior art.

20 **Figure 2** is an illustration of the functional block diagram of one embodiment of the present invention using one type of fractional expansion formula in the frequency ratio generator.

Figure 3 is an illustration of the functional block diagram of another embodiment of the present invention using different type of fractional expansion formula in the frequency ratio generator.

25 **Figure 4a** is an example of the functional block diagram of a 969.9875 MHz frequency synthesizer, using an external analog (RF) quadrature modulator IC operated in SSB mode to provide a translation of the VCO frequency, followed by a fixed digital divide-by-8 integrated circuit in order to scale the frequency down to about 120 MHz, which is
30 within the operating range of a chosen digital ASIC (or FPGA).

Figure 4b is an example of a generation of 9.9875 MHz signal used in conjunction with a synthesizer of **Fig.4a**

Figure 5a is an example of the functional block diagram of a wide range tunable synthesizer, operating in 1 GHz to 2 GHz frequency range, with 1 MHz step resolution.

Figure 5b is an example of a generation of a range of different frequencies used in conjunction with a synthesizer of **Fig.5a**

Figure 5c is another example of a generation of a range of different frequencies used in conjunction with a synthesizer of **Fig.5a**

Figure 6a is a block diagram of a digital single sideband mixer (SSB) with quadrature phasing selected for upper sideband (USB) output

Figure 6b is a block diagram of a digital single sideband mixer (SSB) with quadrature phasing selected for lower sideband (LSB) output

Figure 7 is a block diagram of a divide-by -four digital circuit of the prior art, which provides quadrature output signals ($I=0^\circ$ in phase and $Q=90^\circ$ quadrature signal)

Figure 8 is a block diagram of a divide-by -two digital circuit which provides quadrature output signals ($I=0^\circ$ in phase and $Q=90^\circ$ quadrature signal)

Figure 9a is an example of a spectrum of a 1 Hz baseband digital signal of the first frequency in SSB mixer

Figure 9b is an example a spectrum of a 7 Hz baseband digital signal the second frequency in SSB mixer

Figure 9c is a spectrum of a digital signal with dominant energy at 8 Hz, as a result of USB mixing of the signals in **Figures 9a** and **9b**

Figure 9d is a spectrum of a digital signal with dominant energy at 6 Hz, as a result of LSB mixing of the signals in **Figures 9a** and **9b**

Figure 10a is a spectrum of a digital signal as a result of a divide-by-4 of the USB digital signal of **Figure 9c**, with dominant energy at $8/4 = 2$ Hz

5 **Figure 10b** is a spectrum of a digital signal as a result of a divide-by-4 of the LSB digital signal of **Figure 9d** with dominant energy at $6/4 = 1.5$ Hz

Figure 11 is a block diagram of a phase detector employing SSB mixing of the two compared frequencies, where each frequency has quadrature signals (I=0° in phase and
10 Q=90° quadrature signal).

Figure 12 is a block diagram of a digital phase-shift circuit, which provides the phase control capability.

Figure 10a is a spectrum of a digital signal as a result of a divide-by-4 of the USB digital signal of Figure 9c, with dominant energy at 8/4 = 2 Hz

DETAILED DESCRIPTION OF THE INVENTION

The heart of the present invention is the Frequency Ratio Generator (FRG). The basic principle of operation of the FRG relies on the fact that output frequency (oscillator fosc) and input frequency (reference clock fref) always have a rational relationship, i.e. the ratio of the two can always be represented as a ratio of two integer numbers, P and Q, as shown in equation (6):

$$f_{osc}/f_{ref} = P/Q \quad \text{or} \quad f_{osc} = f_{ref} * P/Q \quad (6)$$

Alternatively, fosc/fref ratio can be expressed as a combination of two fractions, per eq. (6a):

$$f_{osc} * P1/Q1 = f_{ref} * P2/Q2 \quad (6a)$$

which is equivalent to factoring P/Q into:

$$P/Q = (P2*Q1)/(P1*Q2) \quad (6b)$$

If the ratio P/Q can be realized in hardware, such that a frequency equal to fref * P/Q is generated, then all what it would take to realize eq. (6) would be to use a PLL and phase lock the oscillator to this frequency. The manner in which the FRG accomplishes this goal is described below.

It is well known in the science of mathematics that any rational number P/Q can be expanded into various equivalent fractions. The equivalent fractions take a form of a series of divided, multiplied, added or subtracted terms, each term being a rational number itself. A simple example of such expansion is $3/2 = 1 + 1/2$. There are numerous possible fraction expansions, but here we are interested in those expansions which are most suitable for implementation in hardware. Examining the four arithmetic operations and the feasibility to implement them in hardware, and keeping in mind that the variable which is being operated upon is frequency, the following can be found:

- Addition: addition of two frequencies $f1 + f2$ requires a single side band (SSB) mixing, where upper sideband (USB) is used. It is well known in the art of frequency conversion that the SSB mixing of two frequencies produces only one dominant frequency, equal to either the sum or the difference of the two

frequencies, depending upon which sideband (upper or lower) is produced. For SSB mixing, quadrature signals (0° and 90° phase signals) of both f_1 and f_2 frequencies is required. This requirement poses some constraints, which will be reviewed later in the discussion on implementation details. Alternatively, a double sideband (DSB) mixing followed by a band pass filter tuned to a desired sideband (and rejecting the unwanted one) can be used, however this approach is not suitable for integration in integrated circuits, primarily because of a need for external filters.

- Subtraction: difference of two frequencies $f_1 - f_2$ can be obtained by SSB mixing, where lower sideband (LSB) is used.
- Multiplication: multiplication of one frequency by an integer - there is no easy way to accomplish this in hardware (a separate PLL with dividers in the loop, or a harmonically locked injection-locked oscillator may be needed to accomplish this function). Multiplication by a factor of 2 is somewhat easier to implement directly, but in general, fraction expansions requiring multiplication are not preferred.
- Division: division of a frequency by an integer - well known dividers or counters can be used for this function.

It follows that expansions using addition, subtraction and division are preferred, and clearly those having fewer number of terms (minimum expansion length) are favored.

One preferred type of fraction expansion that meets the above criteria is expressed in equations (7):

$$f_{osc} / f_{ref} = P/Q = 1 \pm 1/p_1 \pm 1/p_2 \pm 1/p_3 \pm \dots \pm 1/p_n \quad (7)$$

where p_i , $i=1,2,3,\dots,n$ are positive integer numbers.

Another type of preferred expansion is shown in eq. (8):

$$f_{osc}/f_{ref} = P/Q = 1 \pm 1/q_1 (1 \pm 1/q_2 (1 \pm 1/q_3 (\dots 1 \pm 1/q_n))) \dots \quad (8)$$

where q_i , $i=1,2,3,\dots,n$ are also positive integer numbers.

Further types of preferred expansions include expansion of both f_{osc} and f_{ref} frequencies, per eq. 6a, where both $P1/Q1$ and $P2/Q2$ are rational fractions, and each can be expanded into fractions like one in eq. (7) or eq. (8).

A combination of the above equations, where part of the desired signals is synthesized per eq. (7) and part per eq. (8) is yet another preferred fraction expansion.

The manner in which equations (7) and (8) are realized in hardware in the FRG of the present invention is illustrated in **Figure 2.** and **Figure 3.** respectively. Realization of other equations per above, or the combinations of, can be obtained in a similar fashion. Key building blocks in hardware realization are the SSB mixers, for frequency addition/subtraction, and dividers for frequency division. Each of the inputs to SSB mixers contains two signals – in phase and quadrature (not shown in the figures for simplicity). To obtain the quadrature signals, either a delay line having a delay equal to 90° phase shift at the operating frequency (which is not inherently broad-band, since a phase shift of a delay line will vary with frequency of the signal), or a divide-by-two divider circuit can be used, as shown later in one of the embodiments of this invention. This requirement will put a constraint on the coefficients p_i or q_i in the fraction expansion, namely, the coefficients would need to be even numbers, i.e. divisible by two.

The block diagrams in the **Figures 2** and **3** can be directly constructed by following the formulas in eq. (7) and (8), respectively, with the addition of a loop filter and an oscillator, to complete a PLL circuit. The mechanism for frequency acquisition of the PLL is not shown in the figures, since the acquisition is not the focus of this invention. However, should assistance for frequency acquisition be needed, some of the well known techniques in the art, such as a frequency discriminator, which is turned-off upon phase acquisition, or frequency sweeping, or frequency pre-tuning can be used. As an example, frequency pre-tuning, where a separate tuning signal, which is summed together with that of the loop amplifier, can be used to pre-tune the oscillator and bring its frequency close enough to the target frequency, i.e. tune it within the lock-in range of the PLL, so that the PLL can acquire a lock.

For any given fraction P/Q , there may be multiple solutions for set of coefficients p_i and q_i ($i = 1, 2, 3, \dots, n$) in eq. (7) and (8). Multiple solutions provide additional freedom in the design choices. The computation of coefficients p_i and q_i is iterative in nature, and can be accomplished by various available mathematical and engineering tools. If Q is not a prime number, it can be factored into a product of constituent terms, each of which is a prime number raised to an integer exponent. All coefficients p_i and q_i will contain some combination of products of these factors. The more factors Q has, in general, there will be more possible solutions for p_i or q_i . Given f_{osc} and its required increment (f_{step}), the choice of f_{ref} will directly determine the Q (as shown in eq. (10)). This indicates that for any specific range and step size requirement for the oscillator frequency, an optimum frequency f_{ref} can be found, such that a fraction expansion results in an optimum hardware implementation and performance.

For each new frequency, corresponding to a new value of P , in general, a computation of new coefficients p_i or q_i is required. Even for increments of P by 1, the computation may result in completely different values of these coefficients.

The ratio P/Q , being equal to f_{osc}/f_{ref} , represents the minimum possible multiplication ratio, and is therefore equal to the theoretical lower bound of the noise multiplication factor in the loop. For this reason, it can be stated that the FRG is approaching theoretical lowest limit regarding noise multiplication factor occurring in the loop.

Since P is an integer with minimum increment of 1, the minimum available frequency increment is:

$$f_{step} = f_{ref} / Q \quad (9)$$

The f_{step} is the lowest frequency existing in the system (any other frequency in the system is an integer multiple of this frequency). Conversely, $1/f_{step}$ represents the common periodicity of the system, i.e. it is the longest period of any waveform or signal in the system, and therefore the closest distance between any two spectral components of any signal in the system is equal to f_{step} .

For a given reference frequency f_{ref} and frequency increment f_{step} , Q can be computed from

eq. (9):

$$Q = \text{fref}/\text{fstep} \quad (10)$$

Individual terms in eq. (7) have frequencies equal to fref/π , $i = 1, 2, 3, \dots, n$. However,

because of the digital nature, each of these signals will contain harmonics, and the output spectrum will contain numerous frequencies, as a consequence of spectral convolution of all signals present in the processing. Spectral analysis is necessary for each of the synthesized frequencies, to make sure that the spectral purity around the desired output frequency is acceptable. To obtain the spectrum of the output waveform, first a time domain pulse waveform of the signal must be obtained, and FFT computed. The time domain waveform can be obtained by computing the waveform over one full cycle equal to system periodicity (which is equal to $1/\text{fstep}$, per eq. (9)) for each of the internal nodes, or only for specific nodes of interest, as the signals are being processed and/or generated in various building blocks of the synthesizer. Performing FFT will yield the spectral purity information. The minimum frequency spacing between any two spectral lines can not be less than the frequency of fstep and depending on the particular values of coefficients π or q_i , there may or may not be any energy around the desired signal at separation equal to fstep or multiples of it. If the spectral purity is not satisfactory, a new fraction expansion solution should be found, and spectral analysis repeated. If a satisfactory solution can not be found with any fraction expansion, an option to employ external filtering of one or more internal signals can be considered. This would require a signal to exit the IC for external filtering, pass through a filter (the signal will at this point become an analog signal) and re-entry into the IC through some type of a comparator which will convert the analog signal back to digital. As an example of such comparator, a single gate, with DC feedback (through a resistor) from output back to input can be used.

To illustrate the design process in the present invention, an example of fraction expansion and signal synthesis per eq. (7) is provided:

1. Given $\text{fref} = 72 \text{ MHz}$,
2. Synthesize $\text{fosc} = 75.63125 \text{ MHz}$

3. First, find the greatest common factor for the two frequencies (or alternatively, least common periodicity of the periods of the two signals). A frequency of 6.25 kHz is found ($72 \text{ MHz} = 11,520 * 6.25 \text{ kHz}$ and $75.63125 \text{ MHz} = 12,101 * 6.25 \text{ kHz}$). Note that 12,101 is a prime number, whereas 11,520 can be factored as

$$11,520 = 2^8 * 3^2 * 5$$

4. Form a ratio $f_{osc}/f_{ref} = P/Q = 12,101 / 11,520$
5. Expand the ratio per eq. (7): $12,101 / 11,520 = 1 + 1/20 + 1/2304$ (Note: $20 = 4 * 5 = 2^2 * 5$ and $2304 = 2^8 * 3^2$, i.e. each term is a product of subsets of factors of 11,520)

6. Implement per **Figure 2**, with the following specific values:

- p1 division ratio = 20 (resulting frequency is $72 \text{ MHz}/20 = 3.6 \text{ MHz}$)
- p2 division ratio = 2304 (resulting frequency is $72 \text{ MHz}/2304 = 31.25 \text{ kHz}$)
- First SSB mixer uses USB
- Second SSB mixer uses USB

7. Compute in time domain the output waveform and perform the FFT; examine the spectrum in the vicinity of desired output frequency (75.63125 MHz) and, based on the spectral content maximum, determine the loop bandwidth for the required sideband purity of the oscillator signal. While the lowest fractional frequency in item 6. above is 31.25 kHz (which is a 5th harmonic of 6.25 kHz), by spectral analysis of the output waveform it is found that the spectrum contains a 12.5 kHz term (2nd harmonic of 6.25 kHz) offset from the main signal at 75.63125 MHz, at a level about 50 dB below the main signal. This signal would be converted in a phase detector down to 12.5 kHz baseband frequency. For instance, for sideband purity of 70 dB of the output oscillator, the maximum loop bandwidth of a third order loop could be about 6 kHz, since it will provide about 20 dB rejection at 12.5 kHz.

8. If necessary, obtain a different fraction expansion solution, e.g.: $12,101/11,520 = 1 + 1/4 * (1/5 + 1/9) - 1/8 * 1/4 * (1 - 1/8)$ and repeat the process. By spectral analysis in this case, it was found that a lowest frequency term of 31.25 kHz will exist at

the output of the phase detector, at about -40 dB. In this case, a third order loop with LBW of about 10 kHz can be used, for the same 70 dB purity of the output signal.

5 The noise multiplication figure in the loop is only $20\log(75.63125/72) = 0.4$ dB. For a step size of 6.25 kHz, the prior art PLL of a dual modulus type would have $20\log(12,101) = 81.6$ dB of noise gain. This example illustrates a dramatic improvement that can be achieved with the present invention.

10 Detailed description of the preferred embodiments of the present invention is presented below.

15 The first preferred embodiment of the present invention is shown in **Fig. 4a**. The Rational Synthesizer in this example has been designed to synthesize a frequency of 969.9875 MHz, which is used as a local oscillator in a CATV upconverter. The upconverter is of a dual conversion type, where this signal is used as a local oscillator LO1 in the first upconversion stage. This frequency is offset by 12.5 kHz from a 970 MHz frequency. The offset of 12.5 kHz is required by FCC regulation for some channels, as discussed earlier. For some other channels, which require an offset of 25 kHz, this synthesizer can be tuned to a frequency of
20 969.975 MHz. For all other channels which do not require offsets, the synthesizer can be tuned to 970 MHz frequency.

We'll focus the discussion to a 12.5 kHz offset case, i.e. $f_{osc} = 969.9875$ MHz

25 Since the f_{osc} frequency exceeds the maximum clock rate of the digital IC (ASIC) selected for this application (which has about 200 MHz maximum clock rate), an external divider of a division ratio of 8 had to be used.

A system clock frequency of 72 MHz was chosen. The choice of this frequency was based on several considerations, the first being the factorization of this frequency in respect to 12.5
30 kHz. Other considerations included the design aspects of a crystal oscillator used as a

physical source. To utilize the full benefit of the ASIC's speed, a 72 MHz clock was doubled-up to a 144 MHz clock, for use as a reference frequency f_{ref} . The doubling was accomplished within the same ASIC (the doubler is not shown in **Fig.4a**, since a standard technique with gate delays and XOR gates, well known in the art was used).

5

Both f_{osc} and f_{ref} are integer multiples of 12.5 kHz. The rational expansion was chosen per the combination of eq. (7) and (8):

$$f_{osc} = [(8 * (1-1/6) + \frac{1}{2} * (1/2+1/45) * 1/4 * (1+1/16))] * f_{ref} \quad (11)$$

To check the computation in terms of frequencies, substituting 144 MHz for f_{ref} in eq. (11):

$$10 \quad f_{osc} = 1152 * (1-1/6) + 18 * (1/2+1/45) * (1+1/16) = 8 * 120 + 9.9875 = 969.9875 \text{ MHz} \quad (12)$$

Each of the terms in eq. (11) represents some physical frequency. The sequence of arithmetic operations in the above formula will affect which physical frequencies are generated (i.e. by commutating the arithmetic operations, different frequencies will be generated). The sequence of the arithmetic operations and the actual frequencies in this embodiment can be found in **Fig.4a**.

15

To shift the oscillator frequency to 960 MHz, an RF quadrature modulator circuit IC, operated as an SSB mixer is used. The quadrature modulator is fed, on one side by the output signal of the oscillator, serving as a local oscillator (LO) in the quadrature modulator, and on the other side by a signal of frequency $f_m = 9.9875$ MHz serving as a modulation signal supplied by the ASIC. The LO signal is internally in the IC split in quadrature, whereby 0° and -90° components provide the LO drive to their respective mixers in the quadrature modulator. The f_m signal is also split in quadrature, in the ASIC. The output of the quadrature modulator will contain only one sideband, either lower sideband (LSB) or upper sideband (USB), depending upon the phase of the quadrature component of f_m . If this component lags by 90° , an LSB signal will be generated. If this component leads by 90° , an USB sideband will be generated. The phasing is chosen for LSB, so that output of the quadrature modulator will be at frequency $f_{osc} - f_m = 960$ MHz. This signal is presented to the divide-by-8 prescaler/divider, which produces the frequency of 120 MHz at its output.

25

30

This frequency is compared in a phase detector with another 120 MHz signal, generated from 144 MHz reference clock signal with the FRG inside the ASIC. This frequency is generated by dividing 144 MHz by 6, where 24 MHz quadrature signals are produced, and mixing this signal in an LSB mixer (such as one in **Fig.6b**) with 144 MHz (the 144 MHz quadrature signal is obtained with a precise delay through several gates), to produce 120 MHz. The output of the phase detector is supplied to a loop filter, which drives the tuning line of the oscillator and closes the PLL circuit, so that a phase lock of the oscillator is established.

Returning back to considerations regarding spectral purity implications as a result of practical limitations in the performance of the quadrature modulator, it is not difficult to find that in addition to the desired sideband, the output spectrum will contain other, undesired terms, caused by imbalances in the in-phase and quadrature signal paths. In addition to a desired $f_{osc} - fm$ term, there will also be undesired terms, which will at minimum include the LO leakage at f_{osc} frequency, the other sideband at $f_{osc} + fm$ frequency, as well as the direct leakage of the modulation signal at fm frequency. In addition, it is likely that numerous other sidebands caused by harmonics of modulation frequency fm will exist. All these terms must be regarded as spurious components, and each of those can potentially degrade the spectral purity, if it falls within or close to the LBW after being processed in the synthesizer. The relative power of these terms at the output of the quadrature modulator will depend upon the amount of imbalance and amount of direct leakage around the circuit. With the typical quadrature modulator IC in a reasonably well designed application circuit, the level of undesired signals of no less than -30 dBc could be expected. Since the fm signal in the first preferred embodiment of the invention is a digital signal, it will contain harmonics of the fundamental frequency fm , where the level of specific harmonics will depend upon the duty cycle, as well as on the rise time of the pulses. If the duty cycle is close to 50%, predominantly odd order harmonics of fm will be present ($3 fm$, $5 fm$, etc.), and with fast rise time of the pulses, the third harmonic could reach as high as -10 dBc levels. A spectrum of such digital signal is displayed in **Fig.9a**, normalized to a frequency of 1 Hz, for clarity.

When such a complex spectrum is presented to the input of a prescaler or divider, the first effect that will occur is the limiting of the signal on the strongest tone. The limiting will convert any AM that may be present into PM, which will result in a bi-level signal (i.e. the limiting will effectively convert an analog signal into digital). Next, a so called capture effect similar to the one known in FM systems will occur, where the divider will lock on and divide the frequency of the strongest tone (which is the $f_{osc} - f_m$ in this case), while other terms will appear as PM modulation on this tone. The PM modulation terms will produce sidebands that are spread around the $f_{osc} - f_m$ signal at the distance equal to the integer multiples of f_m . In the division process, only the frequency of $f_{osc} - f_m$ will be divided down, while the PM terms, being the modulation sidebands will remain at the same distance from the main tone after division, only the levels of those terms will be reduced by a division factor, which is consistent with the PM or FM modulation index scaling phenomena associated with a process of division, where only the sideband level, not the frequency distance, gets reduced by a factor equal to the division ratio. However, reduced spur levels through the division process will offer no relief to the spectral purity conditions, since all the terms appearing in the vicinity of the LBW at the output of phase-frequency detector will be multiplied back by the PLL loop by the exact same amount equal to the division ratio. After the entire division process in this example, the spectral content of the signal presented to the phase-frequency detector will include the main tone at 120 MHz, surrounded by other terms at 9.9875 MHz spacing. The negative frequencies (if any, depending on the division ratio) will fold back around DC to positive ones.

A 120 MHz signal applied to the other side of the phase detector contains its own sidebands. The phase-frequency detector will perform the operation of multiplication of the two signals (in time domain, which is equivalent to the operation of mixing in the frequency domain), which will produce the spectrum equal to the convolution of the spectrums of the two signals. In the mixing process, all spectral components present around 120 MHz and its harmonics will translate to spectral components around DC at the output of the phase detector. The distance of these components from DC will be equal to the distance of the

original components from the main signal.

In real implementation in a digital ASIC, there may be a case of adverse (undesired) coupling of the signals through internal structures of the IC (such as substrate, bond wires, etc.) that in general can degrade spectral purity and produce spectral components which are not expected per the results of computations or simulations. To minimize such effects, it is beneficial to use differential (complementary) signals wherever possible, in order to utilize well known benefits of reduced coupling and cross-talk of such signals, as well as to optimize internal layout of the IC.

The frequency $f_m = 9.9875$ MHz in eq. (12), is generated by a circuit shown in **Figure 4b**.

Note: In this, and other figures, a letter ϕ is used to indicate that division produces quadrature components, i.e. that it has two outputs - 0° and 90° .

The manner in which this signal is generated follows directly from eq. (11). First, 144 MHz reference signal is split in two signals, one divided by 2 in quadrature (using a circuit of **Fig.8**) and another divided by 45, also in quadrature. The dividers used for division by 45 are similar in nature to that of **Fig.8**, except that the quadrature signals are not exactly 90° apart (88° in this example, as indicated in **Fig. 4b**). In general, division by non-binary numbers can not produce exact quadrature, however with a proper choice of division sequence, choice of triggering (either on the raising edge or on the falling edge) and choice of signal polarity, the quadrature conditions can be approached close enough, so that degradation of the SSB signal (i.e. reduced rejection of the unwanted sideband or signal feed-through) is acceptable. The two signals are next applied to an USB mixer, such as one shown in **Fig.6a**., to produce a 75.2 MHz signal, which is further divided by two, to a 37.6 MHz frequency, which is in turn mixed in another USB mixer with its version divided by 8, to finally produce a signal at 9.9875 MHz.

To illustrate spectral conditions at the output of a digital SSB mixer (with normalized frequencies down to a few Hz for clarity), in **Figure 9c** a spectrum of a digital signal with dominant energy at 8 Hz, as a result of USB mixing of the signals in **Figures 9a** and **9b**, using the circuit of **Figure 6a** is shown.

As another illustration of a spectrum at the output of a digital SSB mixer, in **Figure 9d** a spectrum of a digital signal with dominant energy at 6 Hz, as a result of LSB mixing of the signals in **Figures 9a** and **9b**, using the circuit of **Figure 6b** is shown.

5

To illustrate the spectral conditions at the output of a digital divider when dividing an SSB signal, in **Figure 10a** a spectrum of a digital signal as a result of a divide-by-4 of the USB digital signal of **Figure 9c**, with dominant energy at $8/4 = 2$ Hz is shown.

10 As another illustration of the spectrum at a digital divider when dividing an SSB signal, in **Figure 10b** a spectrum of a digital signal as a result of a divide-by-4 of the LSB digital signal of **Figure 9d** with dominant energy at $6/4 = 1.5$ Hz is shown.

The spectral plots in the figures above were obtained by computing time domain waveforms and applying FFT transform.

15

A block diagram of a wide range tunable synthesizer, operating in 1 GHz to 2 GHz frequency range, with 1 MHz step resolution is shown in **Figure 5a**. The application of this synthesizer is in the same CATV upconverter, except this signal is used as a local oscillator LO2 in the second upconversion stage. The circuit uses an external digital divide-by-two circuit followed by an analog (RF) quadrature modulator IC operated in SSB mode to provide a translation of the local oscillator frequency, further followed by a fixed digital divide-by-8 IC in order to scale the frequency down to about 130 MHz and below, which is within the operating range of a chosen digital ASIC (or FPGA).

20

The fraction expansion can be performed in a similar manner as in the previous example. As a result of such expansion, various frequencies internally needed in the FRG, in order to synthesize all required oscillator frequencies can be computed. The embodiment of the fraction expansion and the generation of all required frequencies is shown in **Figure 5b** and **Figure 5c**. All frequencies shown in these figures are derived from 144 MHz reference signal, in a similar manner as in the first example, using similar circuits for the division and SSB mixing process.

30

An embodiment of an improved phase detector over the prior art is shown in **Figure 11**. This phase detector employs SSB mixing of the two compared frequencies, where each frequency has quadrature signals ($I=0^\circ$ in phase and $Q=90^\circ$ quadrature signal). The circuit in **Fig. 11** is similar to a quadrature modulator circuit, except the phasing is somewhat different. The mixers are of analog type. Compared with a detector of the prior art, this phase detector has a higher gain by a factor of two, since full converted power is contributing to the detection of phase, and a 3 dB better noise figure. The prior art phase detector uses one mixer only, where half the power (the power in the upper sideband) is not used to contribute to the detection of phase difference of two signals.

An embodiment of the SSB phase comparator with digital circuits is possible, where analog mixers are replaced with XOR gates, and the I and Q signals at the output of the XOR gates are summed together by a resistive network.

An embodiment of a digital phase-shift circuit, which provides phase control capability is shown in the block diagram in **Figure 12**. An example of 45.75 MHz signal is shown, where full 360 degrees phase control with 1.25° step resolution is available. This signal (or a signal of different frequency constructed in a similar way), can be added/subtracted to another signal by SSB mixing and so obtaining a phase controlled signal at any desired frequency. Through SSB mixing, the phase control range and step size will remain unchanged, since the SSB mixing is an additive process, both for frequency and phase.

What is claimed is:


- 5 1. A phase lock loop comprising:
 - a reference frequency;
 - a voltage controlled oscillator (VCO);
 - a loop filter coupled to said VCO;
 - a phase detector coupled to said loop filter and said VCO;
 - 10 a frequency ratio generator means, coupled to said phase detector, for
 - generating a desired frequency based on a fraction expansion of the ratio of said
 - desired frequency to the reference frequency.

11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532
 533
 534
 535
 536
 537
 538
 539
 540
 541
 542
 543
 544
 545
 546
 547
 548
 549
 550
 551
 552
 553
 554
 555
 556
 557
 558
 559
 560
 561
 562
 563
 564
 565
 566
 567
 568
 569
 570
 571
 572
 573
 574
 575
 576
 577
 578
 579
 580
 581
 582
 583
 584
 585
 586
 587
 588
 589
 590
 591
 592
 593
 594
 595
 596
 597
 598
 599
 600
 601
 602
 603
 604
 605
 606
 607
 608
 609
 610
 611
 612
 613
 614
 615
 616
 617
 618
 619
 620
 621
 622
 623
 624
 625
 626
 627
 628
 629
 630
 631
 632
 633
 634
 635
 636
 637
 638
 639
 640
 641
 642
 643
 644
 645
 646
 647
 648
 649
 650
 651
 652
 653
 654
 655
 656
 657
 658
 659
 660
 661
 662
 663
 664
 665
 666
 667
 668
 669
 670
 671
 672
 673
 674
 675
 676
 677
 678
 679
 680
 681
 682
 683
 684
 685
 686
 687
 688
 689
 690
 691
 692
 693
 694
 695
 696
 697
 698
 699
 700
 701
 702
 703
 704
 705
 706
 707
 708
 709
 710
 711
 712
 713
 714
 715
 716
 717
 718
 719
 720
 721
 722
 723
 724
 725
 726
 727
 728
 729
 730
 731
 732
 733
 734
 735
 736
 737
 738
 739
 740
 741
 742
 743
 744
 745
 746
 747
 748
 749
 750
 751
 752
 753
 754
 755
 756
 757
 758
 759
 760
 761
 762
 763
 764
 765
 766
 767
 768
 769
 770
 771
 772
 773
 774
 775
 776
 777
 778
 779
 780
 781
 782
 783
 784
 785
 786
 787
 788
 789
 790
 791
 792
 793
 794
 795
 796
 797
 798
 799
 800
 801
 802
 803
 804
 805
 806
 807
 808
 809
 810
 811
 812
 813
 814
 815
 816
 817
 818
 819
 820
 821
 822
 823
 824
 825
 826
 827
 828
 829
 830
 831
 832
 833
 834
 835
 836
 837
 838
 839
 840
 841
 842
 843
 844
 845
 846
 847
 848
 849
 850
 851
 852
 853
 854
 855
 856
 857
 858
 859
 860
 861
 862
 863
 864
 865
 866
 867
 868
 869
 870
 871
 872
 873
 874
 875
 876
 877
 878
 879
 880
 881
 882
 883
 884
 885
 886
 887
 888
 889
 890
 891
 892
 893
 894
 895
 896
 897
 898
 899
 900
 901
 902
 903
 904
 905
 906
 907
 908
 909
 910
 911
 912
 913
 914
 915
 916
 917
 918
 919
 920
 921
 922
 923
 924
 925
 926
 927
 928
 929
 930
 931
 932
 933
 934
 935
 936
 937
 938
 939
 940
 941
 942
 943
 944
 945
 946
 947
 948
 949
 950
 951
 952
 953
 954
 955
 956
 957
 958
 959
 960
 961
 962
 963
 964
 965
 966
 967
 968
 969
 970
 971
 972
 973
 974
 975
 976
 977
 978
 979
 980
 981
 982
 983
 984
 985
 986
 987
 988
 989
 990
 991
 992
 993
 994
 995
 996
 997
 998
 999
 1000
 1001
 1002
 1003
 1004
 1005
 1006
 1007
 1008
 1009
 1010
 1011
 1012
 1013
 1014
 1015
 1016
 1017
 1018
 1019
 1020
 1021
 1022
 1023
 1024
 1025
 1026
 1027
 1028
 1029
 1030
 1031
 1032
 1033
 1034
 1035
 1036
 1037
 1038
 1039
 1040
 1041
 1042
 1043
 1044
 1045
 1046
 1047
 1048
 1049
 1050
 1051
 1052
 1053
 1054
 1055
 1056
 1057
 1058
 1059
 1060
 1061
 1062
 1063
 1064
 1065
 1066
 1067
 1068
 1069
 1070
 1071
 1072
 1073
 1074
 1075
 1076
 1077
 1078
 1079
 1080
 1081
 1082
 1083
 1084
 1085
 1086
 1087
 1088
 1089
 1090
 1091
 1092
 1093
 1094
 1095
 1096
 1097
 1098
 1099
 1100
 1101
 1102
 1103
 1104
 1105
 1106
 1107
 1108
 1109
 1110
 1111
 1112
 1113
 1114
 1115
 1116
 1117
 1118
 1119
 1120
 1121
 1122
 1123
 1124
 1125
 1126
 1127
 1128
 1129
 1130
 1131
 1132
 1133
 1134
 1135
 1136
 1137
 1138
 1139
 1140
 1141
 1142
 1143
 1144
 1145
 1146
 1147
 1148
 1149
 1150
 1151
 1152
 1153
 1154
 1155
 1156
 1157
 1158
 1159
 1160
 1161
 1162
 1163
 1164
 1165
 1166
 1167
 1168
 1169
 1170
 1171
 1172
 1173
 1174
 1175
 1176
 1177
 1178
 1179
 1180
 1181
 1182
 1183
 1184
 1185
 1186
 1187
 1188
 1189
 1190
 1191
 1192
 1193
 1194
 1195
 1196
 1197
 1198
 1199
 1200
 1201
 1202
 1203
 1204
 1205
 1206
 1207
 1208
 1209
 1210
 1211
 1212
 1213
 1214
 1215
 1216
 1217
 1218
 1219
 1220
 1221
 1222
 1223
 1224
 1225
 1226
 1227
 1228
 1229
 1230
 1231
 1232
 1233
 1234
 1235
 1236
 1237
 1238
 1239
 1240
 1241
 1242
 1243
 1244
 1245
 1246
 1247
 1248
 1249
 1250
 1251
 1252
 1253
 1254
 1255
 1256
 1257
 1258
 1259
 1260
 1261
 1262
 1263
 1264
 1265
 1266
 1267
 1268
 1269
 1270
 1271
 1272
 1273
 1274
 1275
 1276
 1277
 1278
 1279
 1280
 1281
 1282
 1283
 1284
 1285
 1286
 1287
 1288
 1289
 1290
 1291
 1292
 1293
 1294
 1295
 1296
 1297
 1298
 1299
 1300
 1301
 1302
 1303
 1304
 1305
 1306
 1307
 1308
 1309
 1310
 1311
 1312
 1313
 1314
 1315
 1316
 1317
 1318
 1319
 1320
 1321
 1322
 1323
 1324
 1325
 1326
 1327
 1328
 1329
 1330
 1331
 1332
 1333
 1334
 1335
 1336
 1337
 1338
 1339
 1340
 1341
 1342
 1343
 1344
 1345
 1346
 1347
 1348
 1349
 1350
 1351
 1352
 1353
 1354
 1355
 1356
 1357
 1358
 1359
 1360
 1361
 1362
 1363
 1364
 1365
 1366
 1367
 1368
 1369
 1370
 1371
 1372
 1373
 1374
 1375
 1376
 1377
 1378
 1379
 1380
 1381
 1382
 1383
 1384
 1385
 1386
 1387
 1388
 1389
 1390
 1391
 1392
 1393
 1394
 1395
 1396
 1397
 1398
 1399
 1400
 1401
 1402
 1403
 1404
 1405
 1406
 1407
 1408
 1409
 1410
 1411
 1412
 1413
 1414
 1415
 1416
 1417
 1418
 1419
 1420
 1421
 1422
 1423
 1424
 1425
 1426
 1427
 1428
 1429
 1430
 1431
 1432
 1433
 1434
 1435
 1436
 1437
 1438
 1439
 1440
 1441
 1442
 1443
 1444
 1445
 1446
 1447
 1448
 1449
 1450
 1451
 1452
 1453
 1454
 1455
 1456
 1457
 1458
 1459
 1460
 1461
 1462
 1463
 1464
 1465
 1466
 1467
 1468
 1469
 1470
 1471
 1472

Abstract

A single loop PLL frequency synthesizer, suitable for frequency applications in the MHz and GHz range, operates at high comparison frequencies (on the order of 100 MHz and higher), with excellent phase noise performance, but allows for small frequency steps (on the order of 10 kHz or less), and is suitable for integration within Application Specific Integrated circuits (ASICs). The basic principle of operation of the Rational Frequency Synthesizer is that the output frequency and the reference clock frequency always have a rational relationship (i.e. the ratio of the two frequencies can always be represented as a ratio of two integer numbers). This ratio can always be expanded into various expressions of equivalent fraction expansions. The equivalent fractions take the form of a series of divided, added or subtracted terms, each term itself being a rational number. For each synthesized frequency, the computation of expansion terms yields specific, different values of the terms, with possibly multiple solutions. The realization in hardware of the computed fraction expansion terms is achieved by the means of a specific combination of frequency division and frequency translation (or frequency conversion) of the reference clock frequency and/or of the oscillator frequency. The above is accomplished through multiple consecutive up or down conversions of these frequencies, using single sideband (SSB) mixers, where either the upper sideband (USB), or the lower sideband (LSB) can be selected by the frequency control means in combination with programmable frequency dividers or counters. The converted and/or divided frequencies are compared in a phase detector, followed by a loop filter in a closed loop manner that provides phase locking of the oscillator. The realization in hardware of the above functions is accomplished by using bi-level (digital) circuits in combination with analog circuits. All necessary frequency control algorithms, instructions, design parameters and values are stored in non-volatile memory, and are used by an on-board controller or micro-processor to generate frequency control signals for the synthesizer's hardware.

FIG. 1 (PRIOR ART)

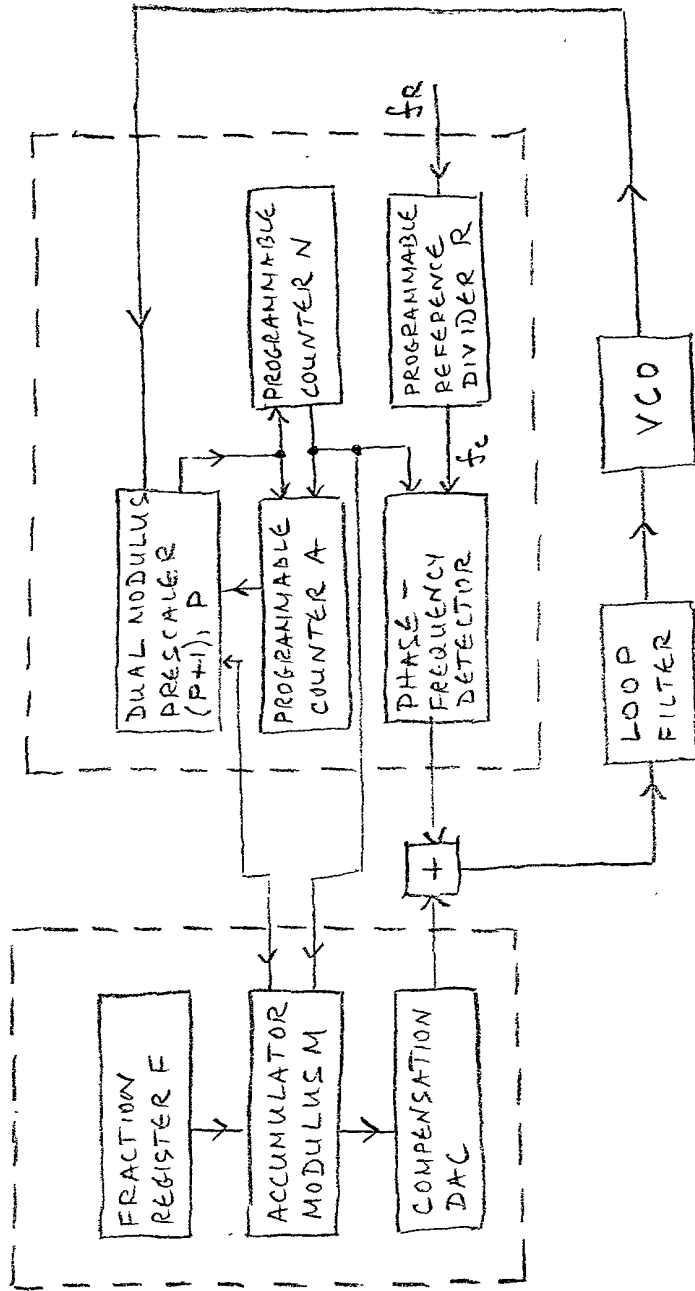

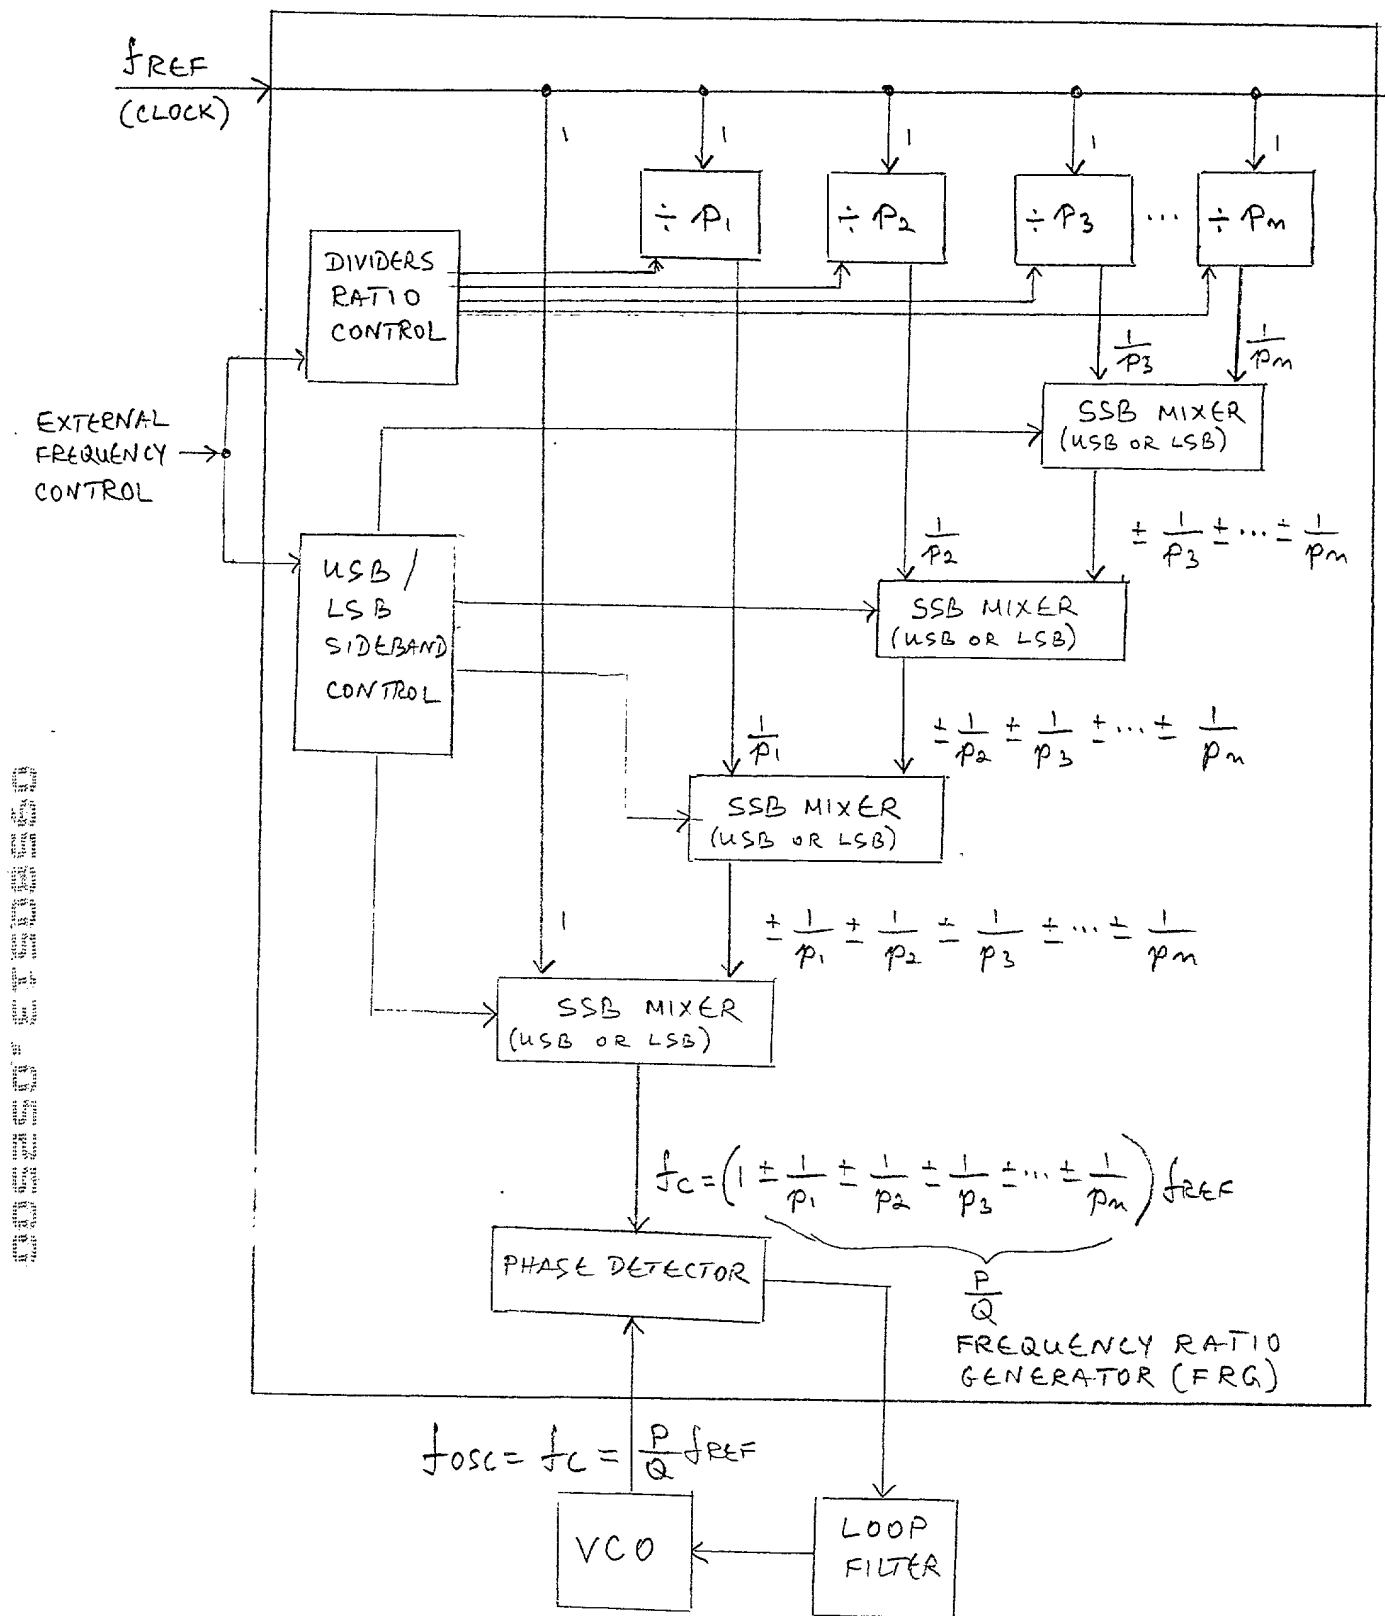


FIG. 2

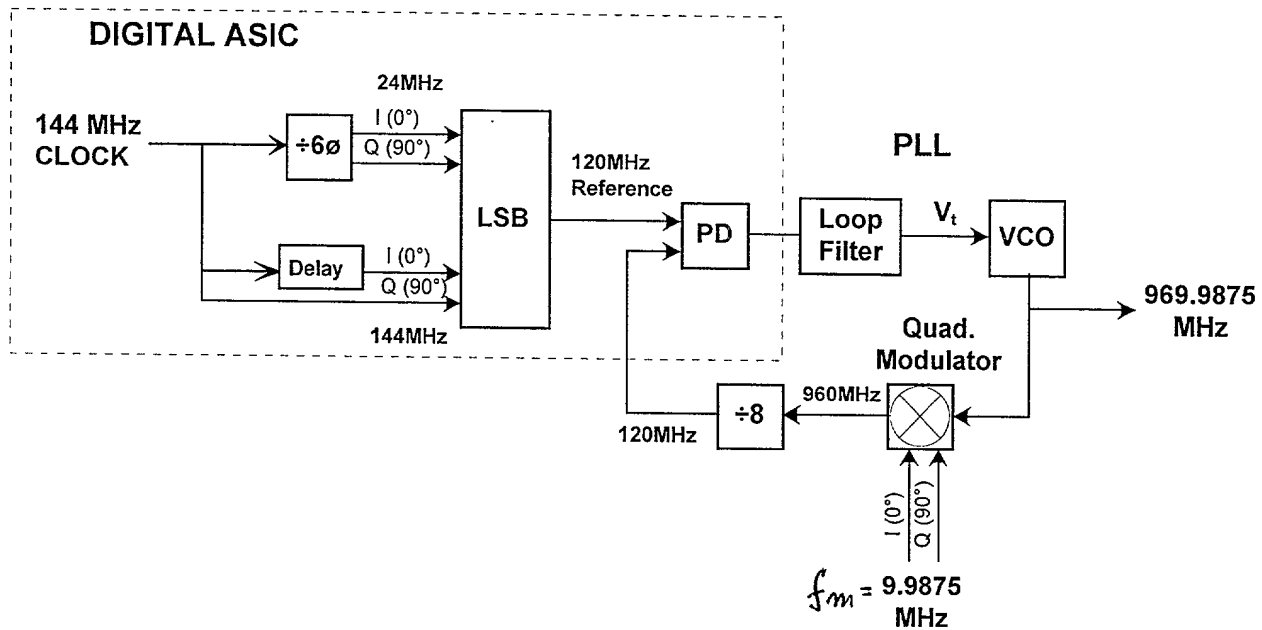


Figure 4a: LO1 generation

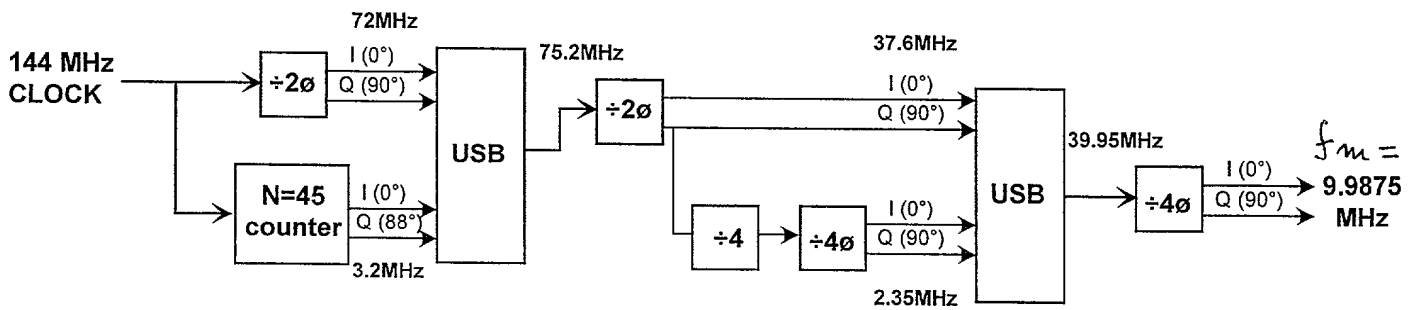


Figure 4b: 9.9875 MHz Offset for LO1 generation

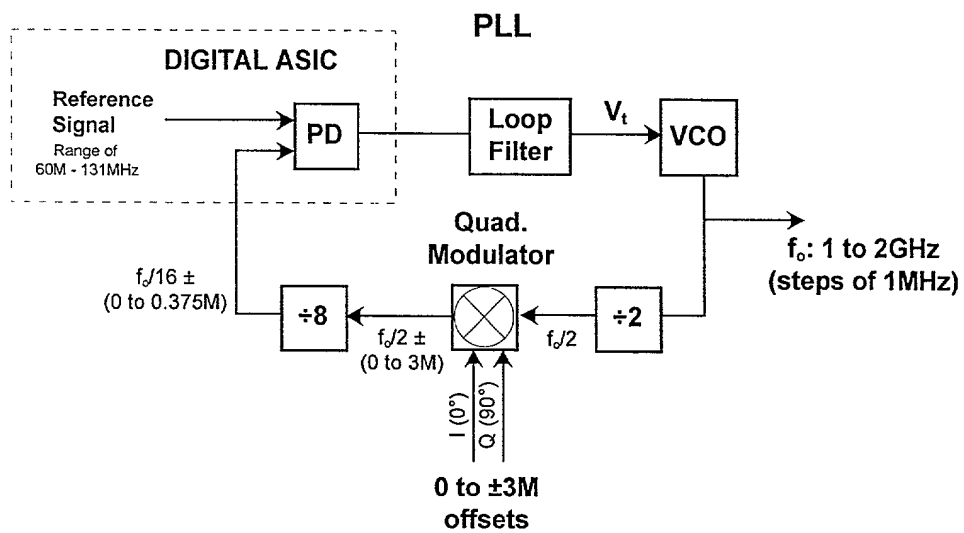


Figure 5a: LO2 generation

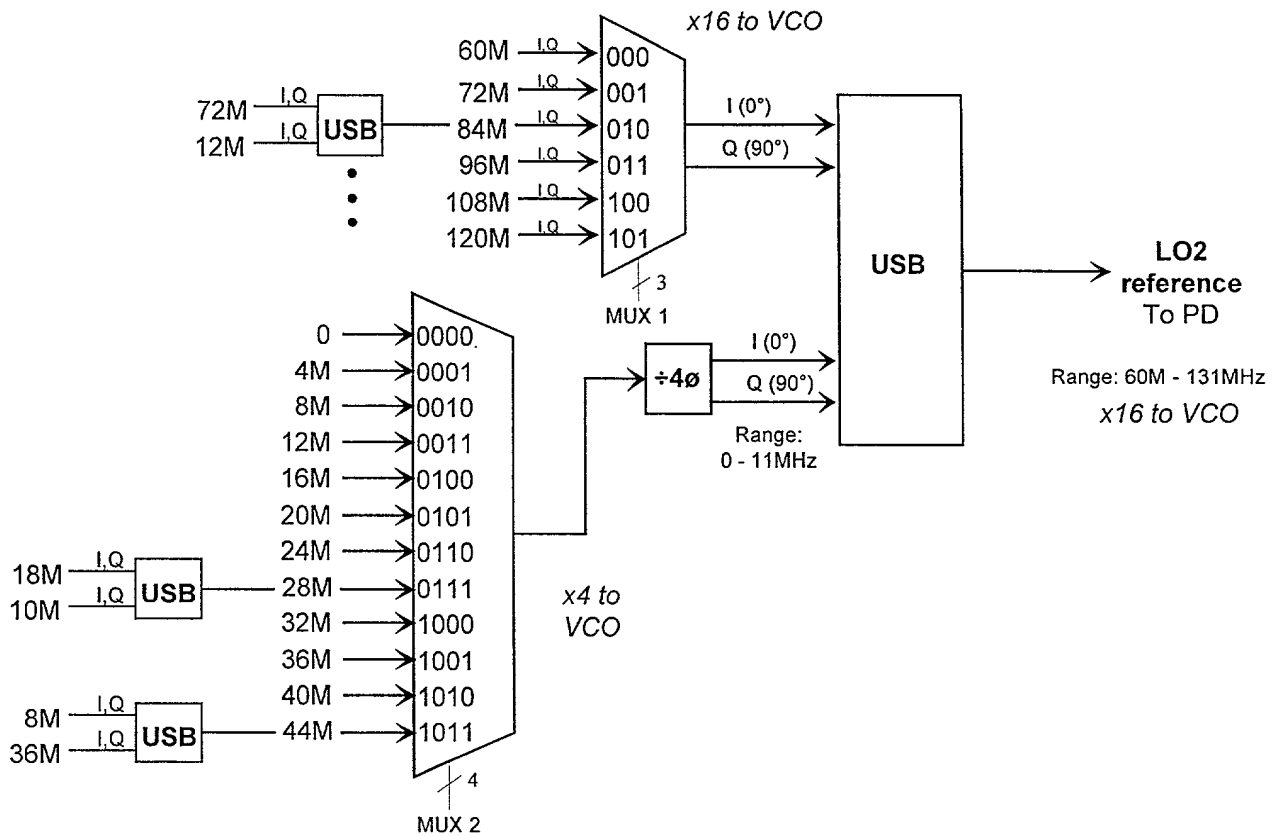


Fig. 5b - Generation of Reference frequency for LO2

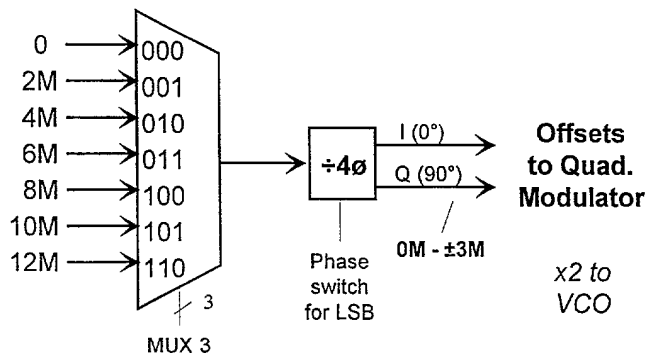


Fig. 5c - Generation of offsets for LO2

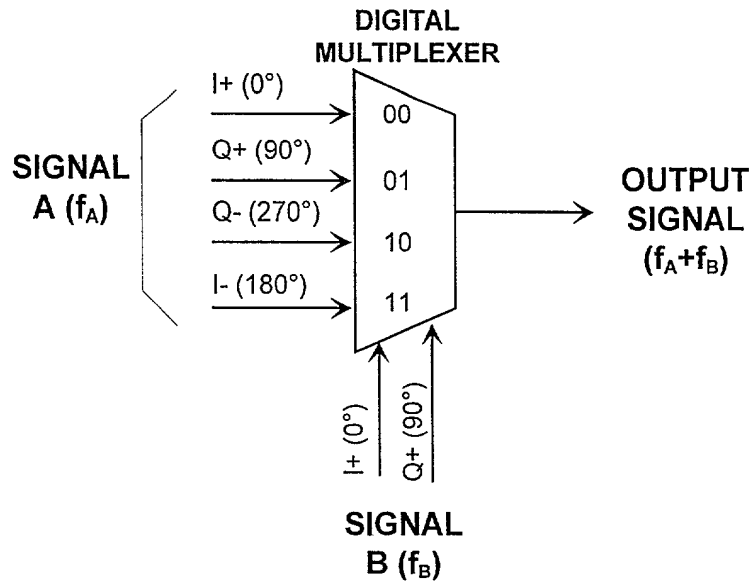


Figure 6a: USB generation block

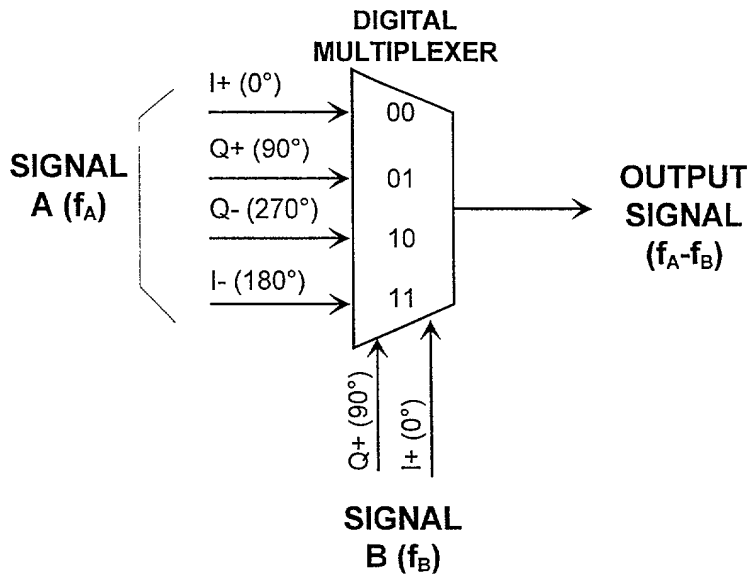


Figure 6b: LSB generation block
(notice that in Signal B, the two inputs are swapped)

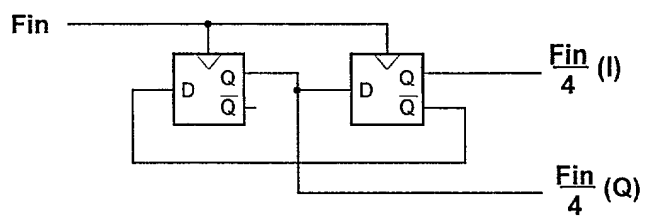


Figure 7: Divide by 4 (quadrature outputs) - Prior art

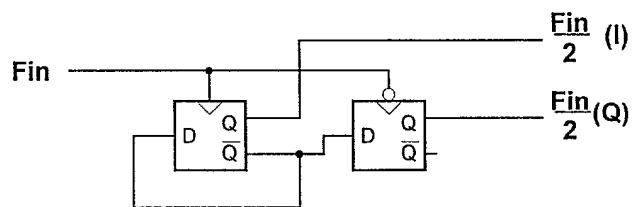


Figure 8: Divide by 2 (quadrature outputs)

W8.11-1

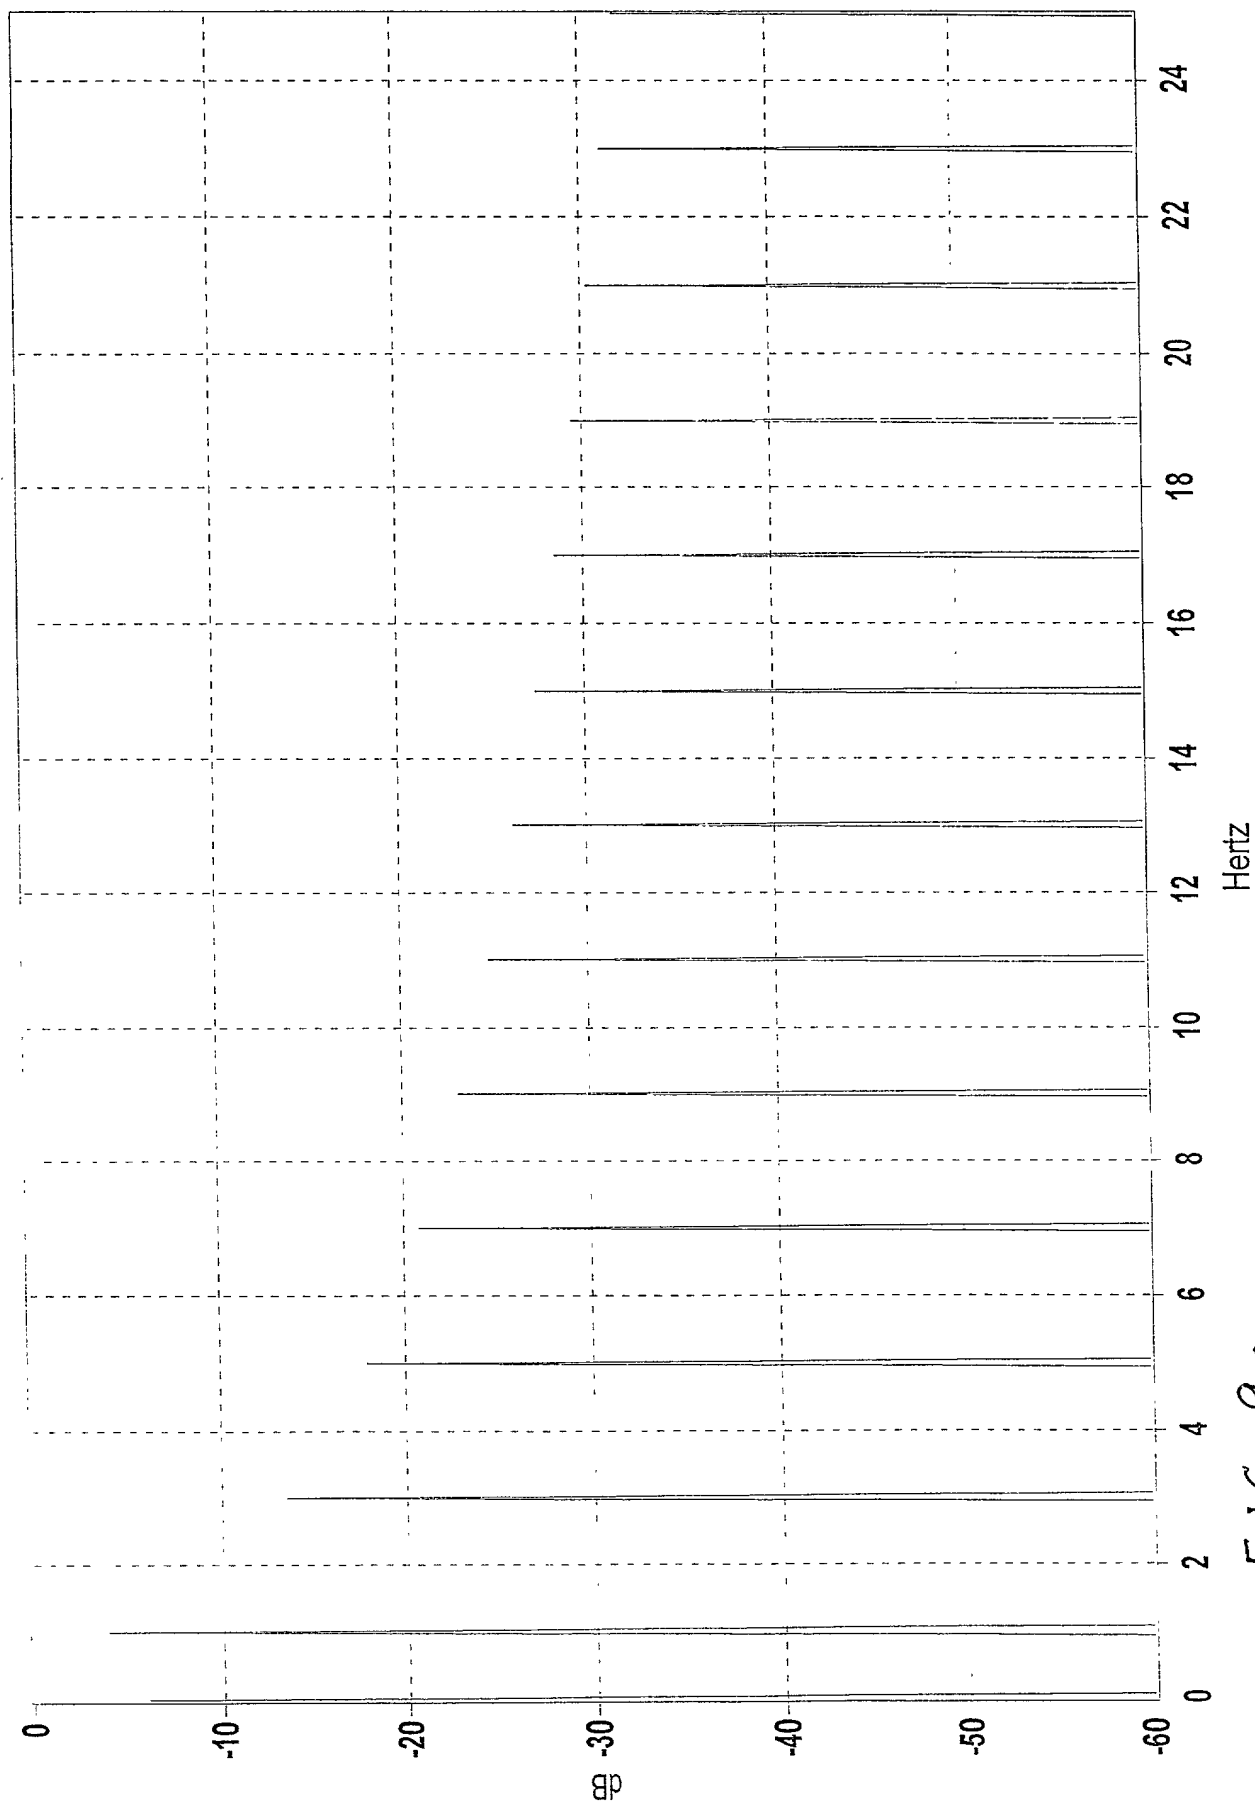


FIG. 9a

W9.12=7

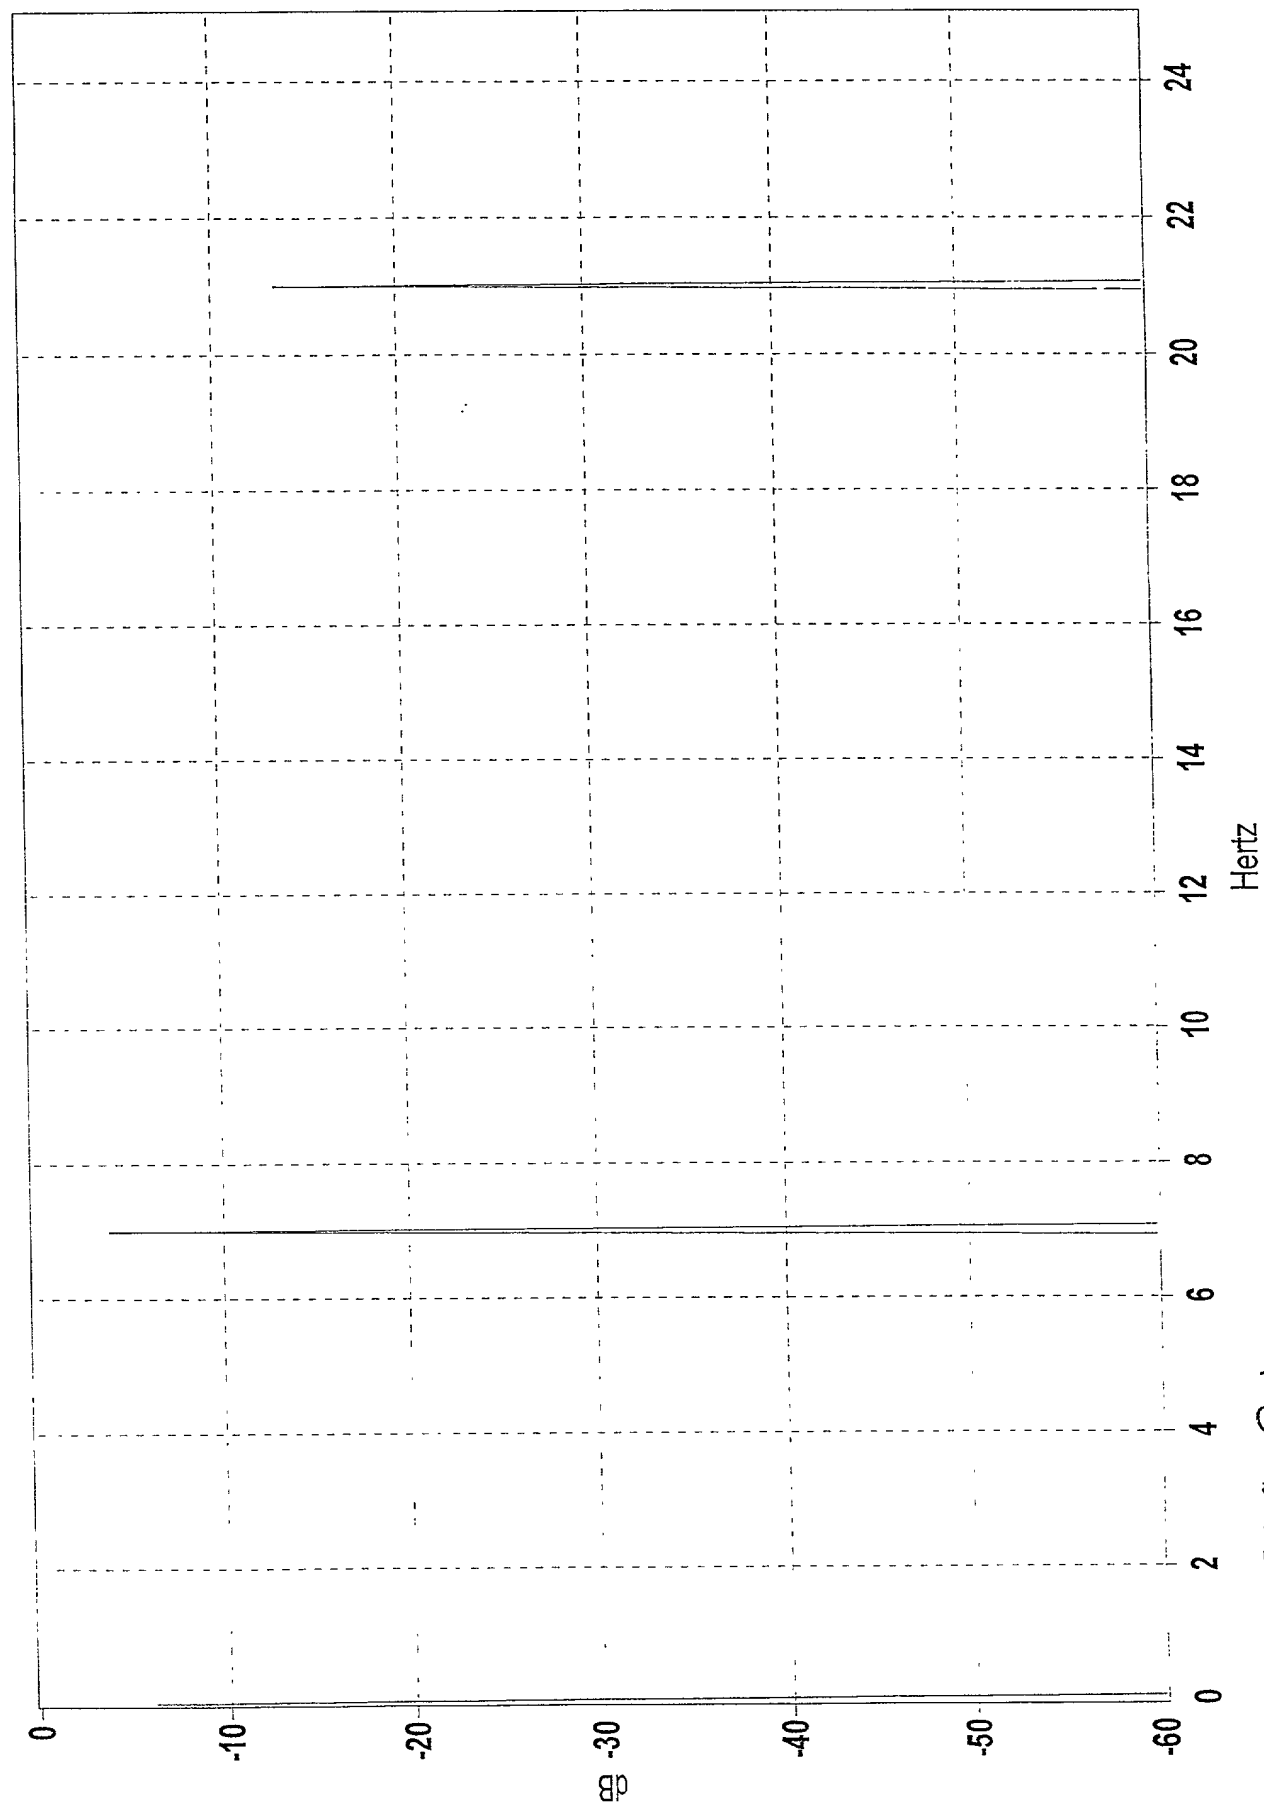


FIG. 9b

W10: USB

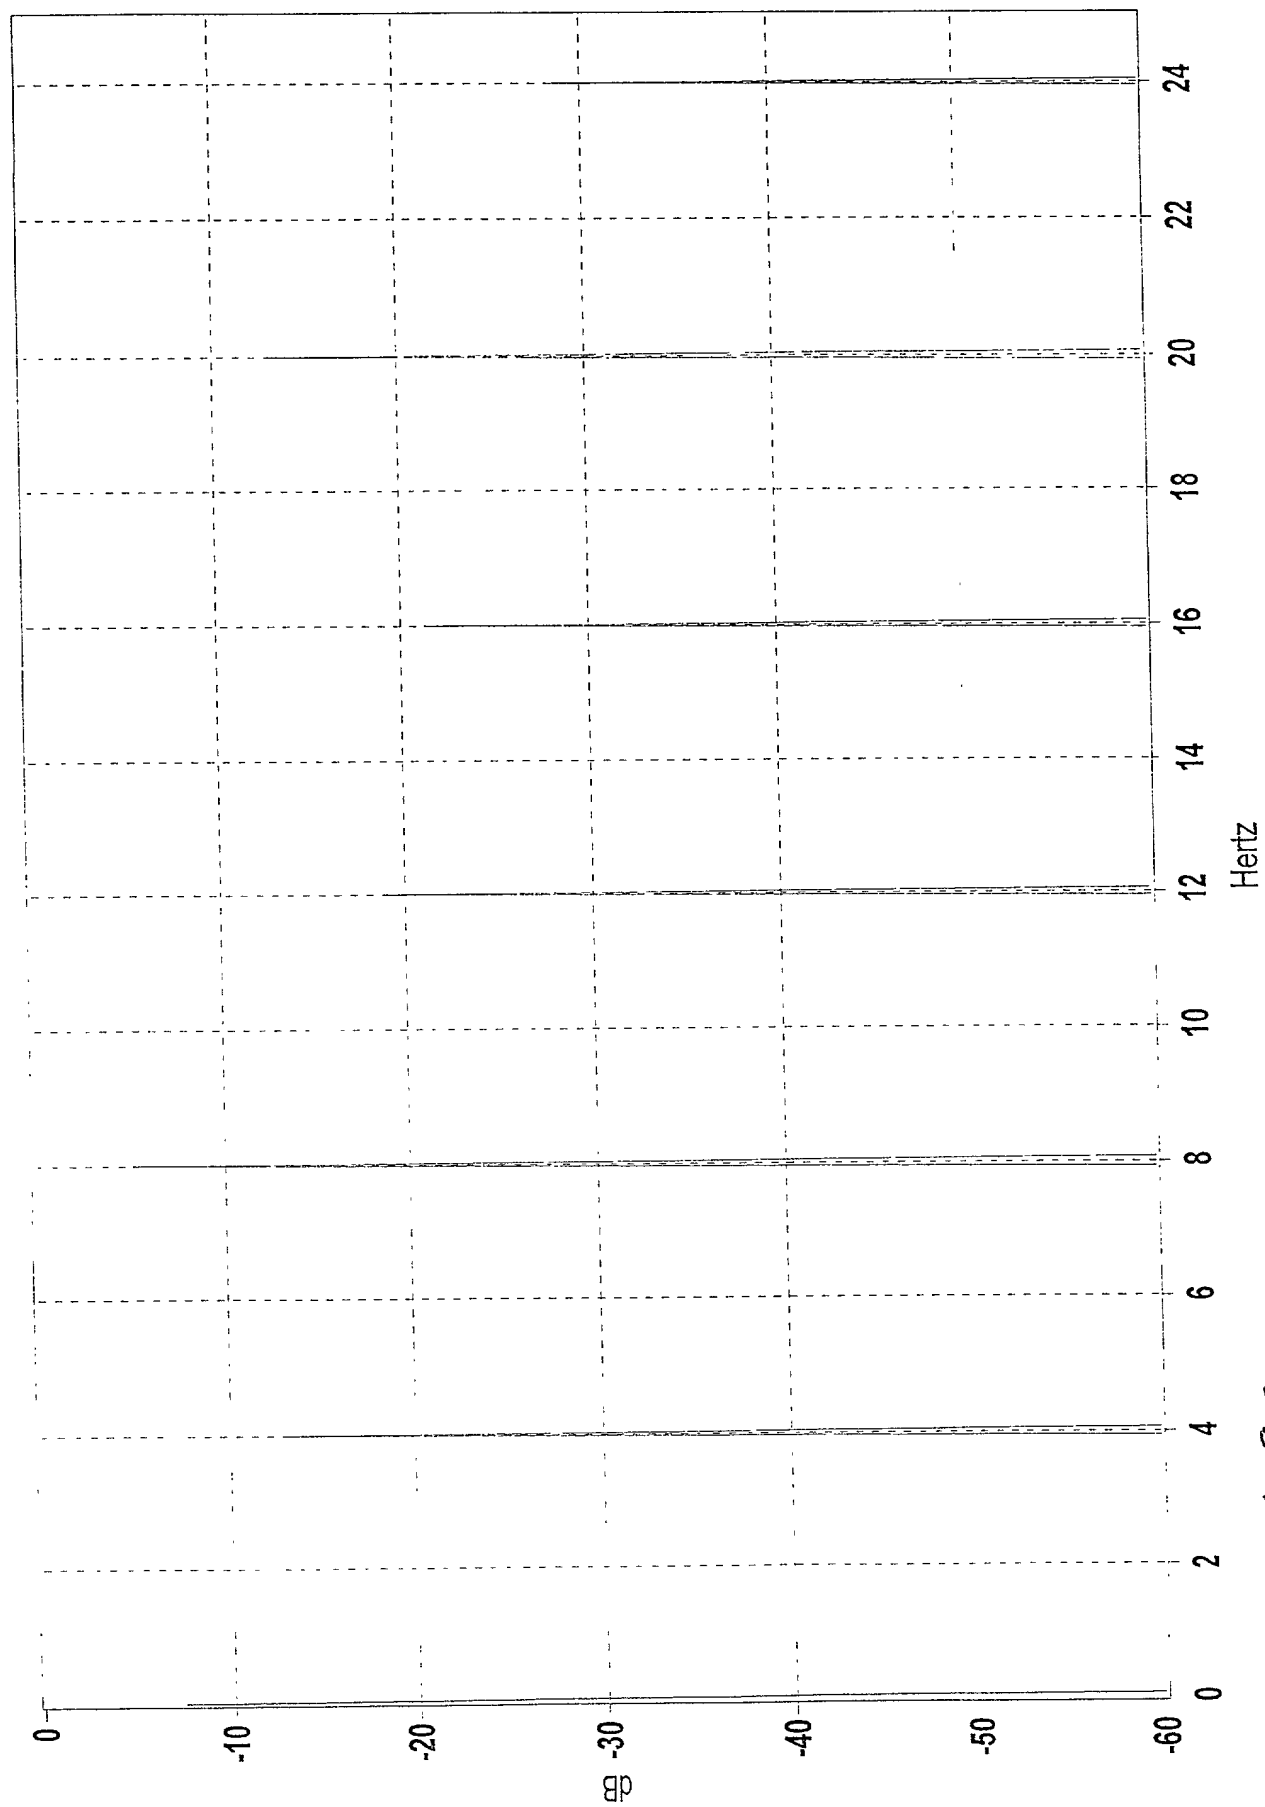


FIG. 9C

W12. LSB

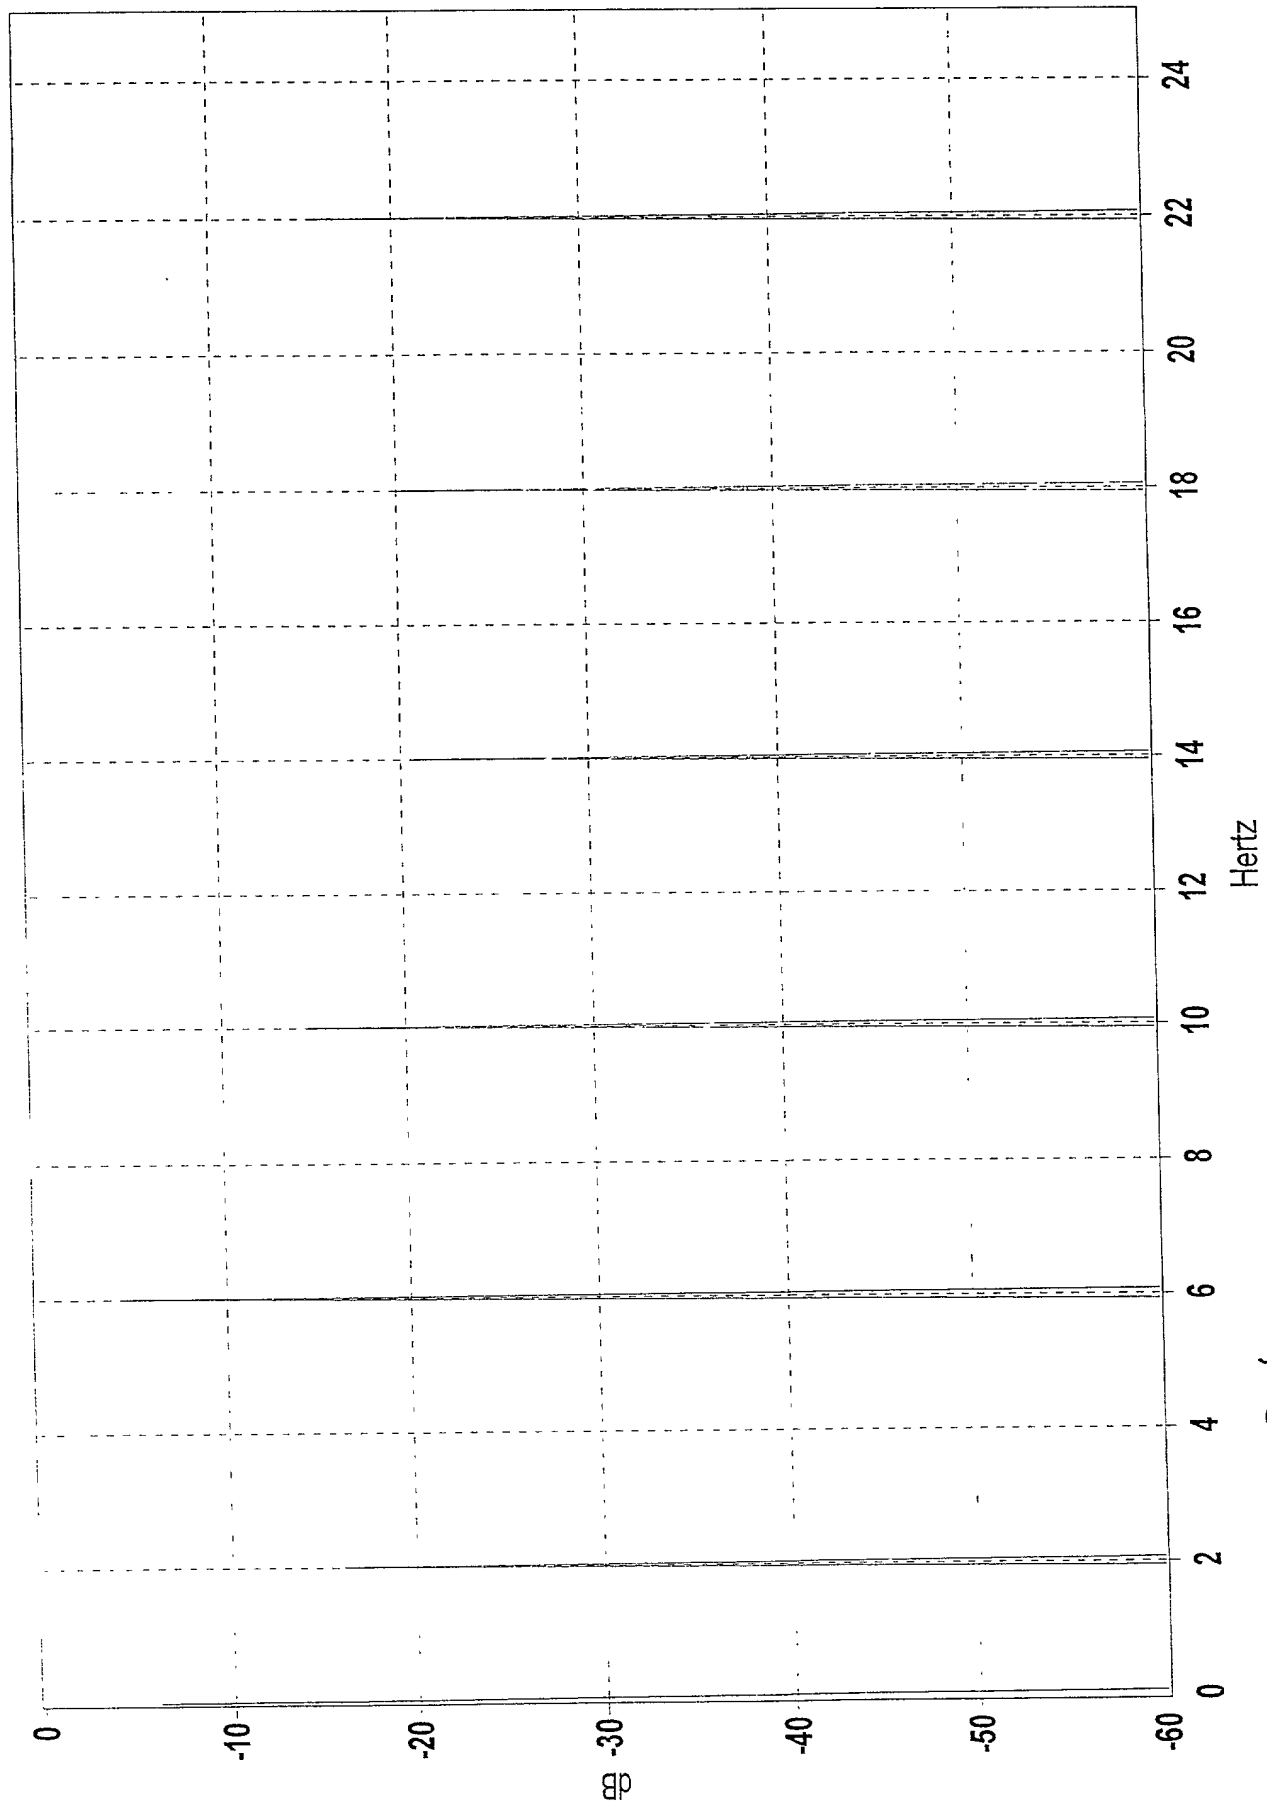


FIG. 9d

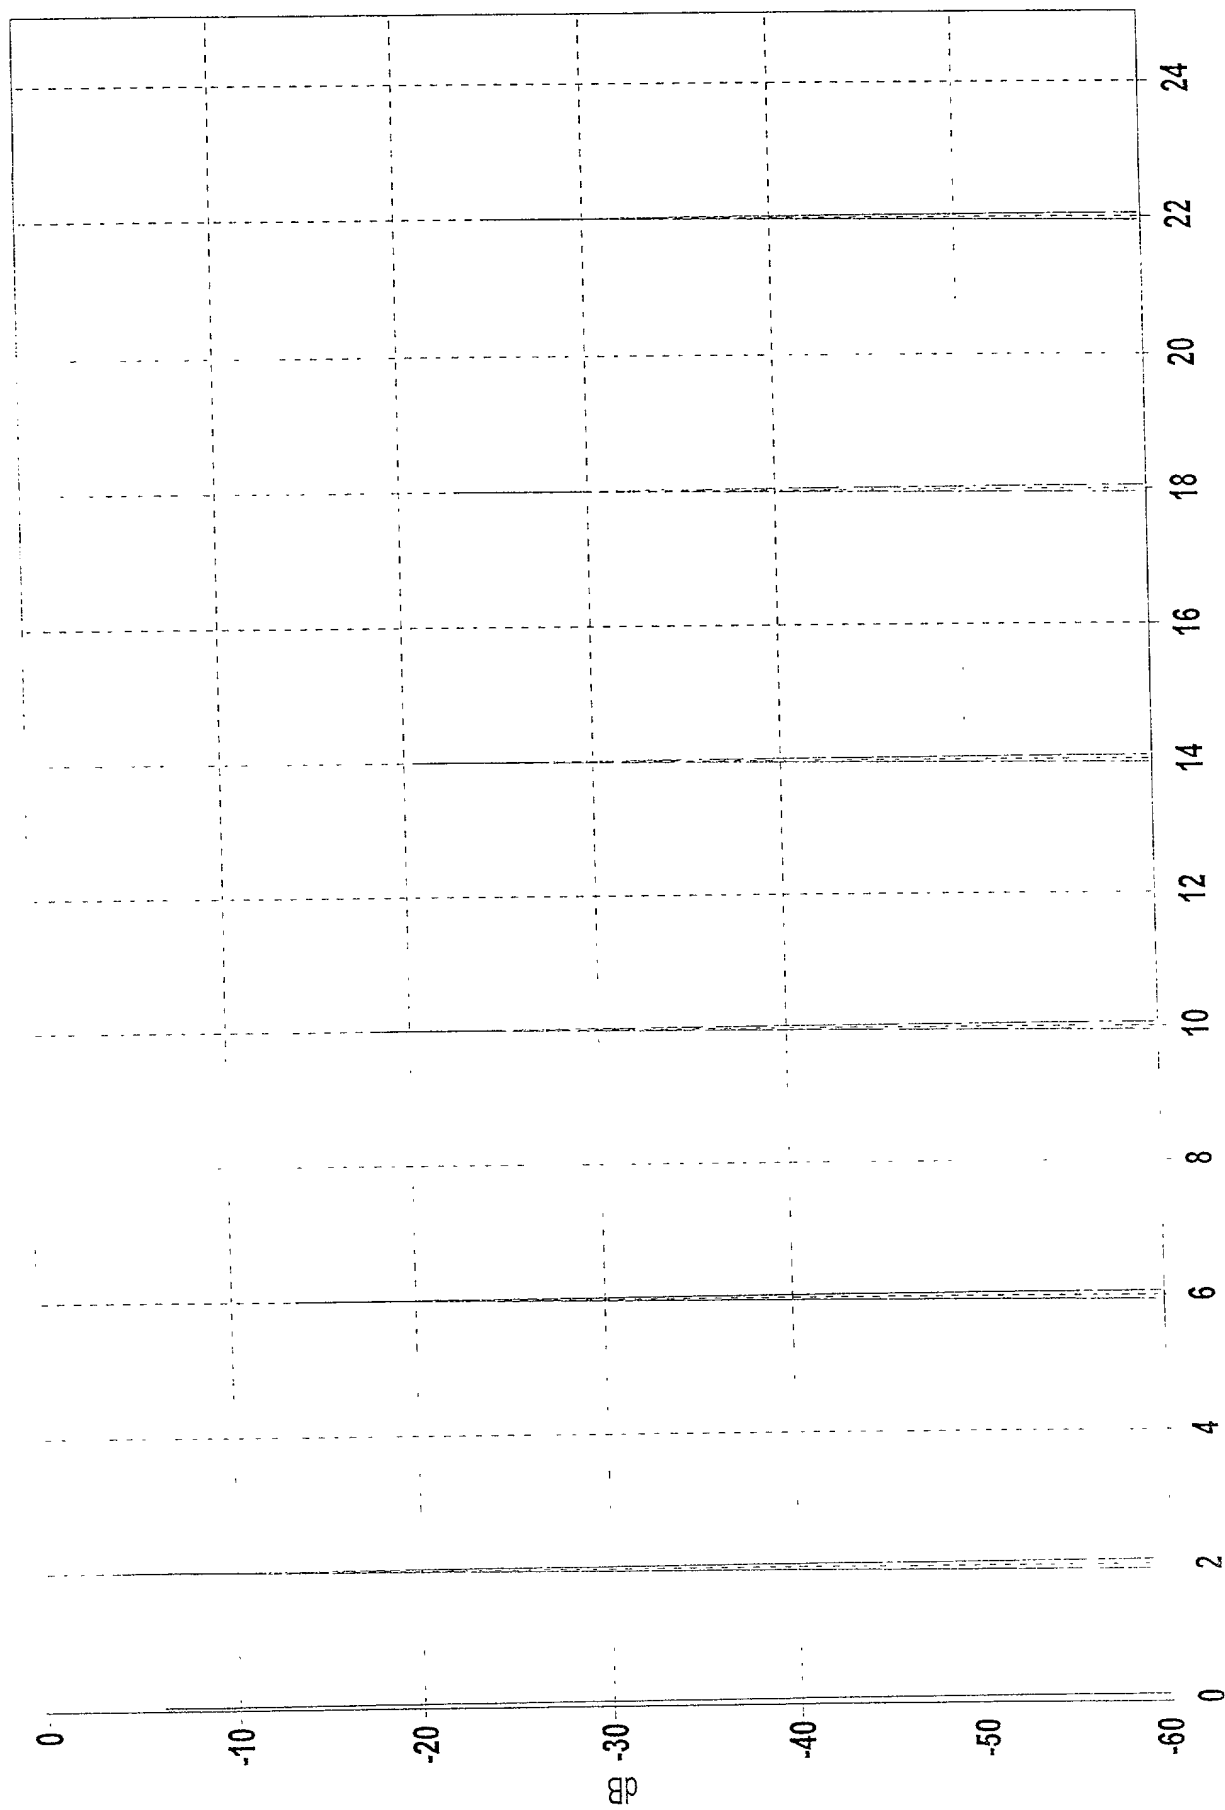
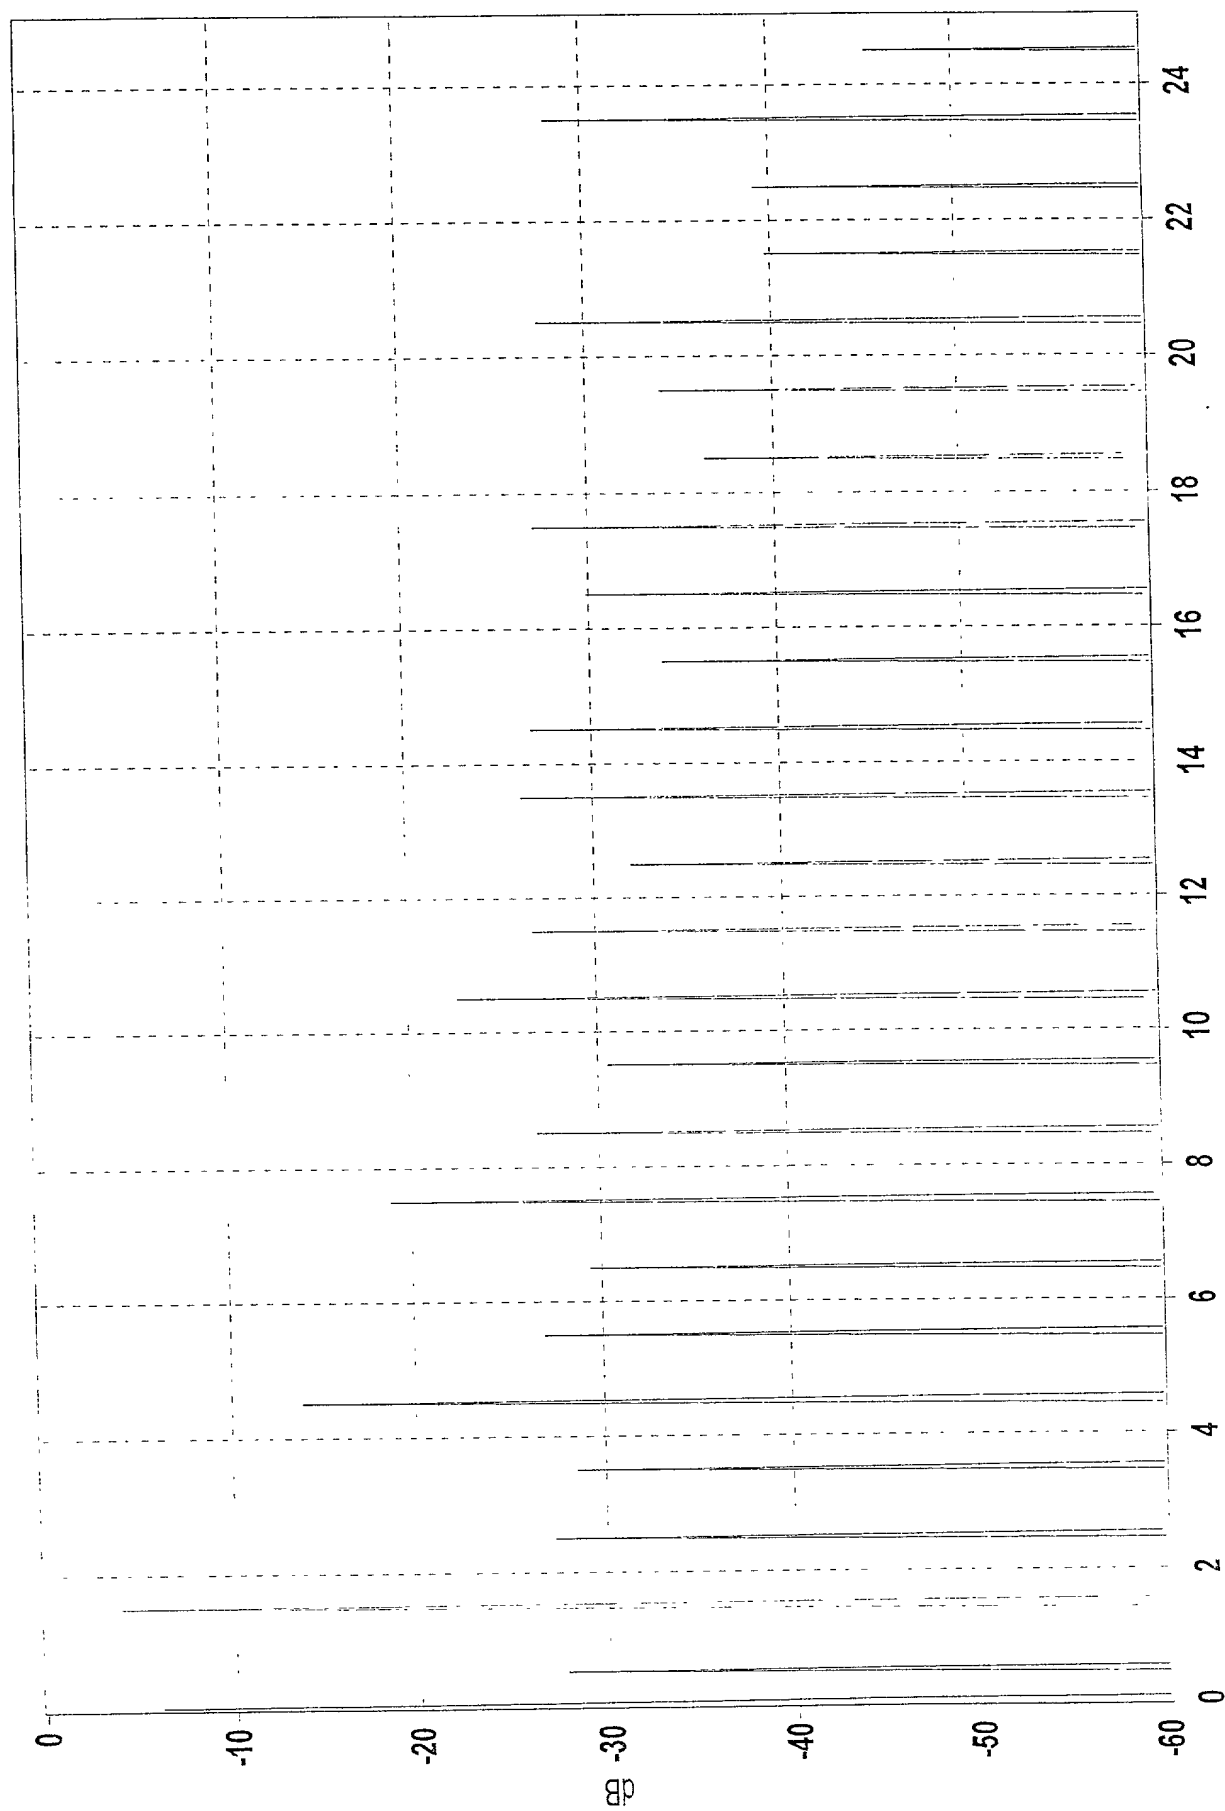


FIG. 10a



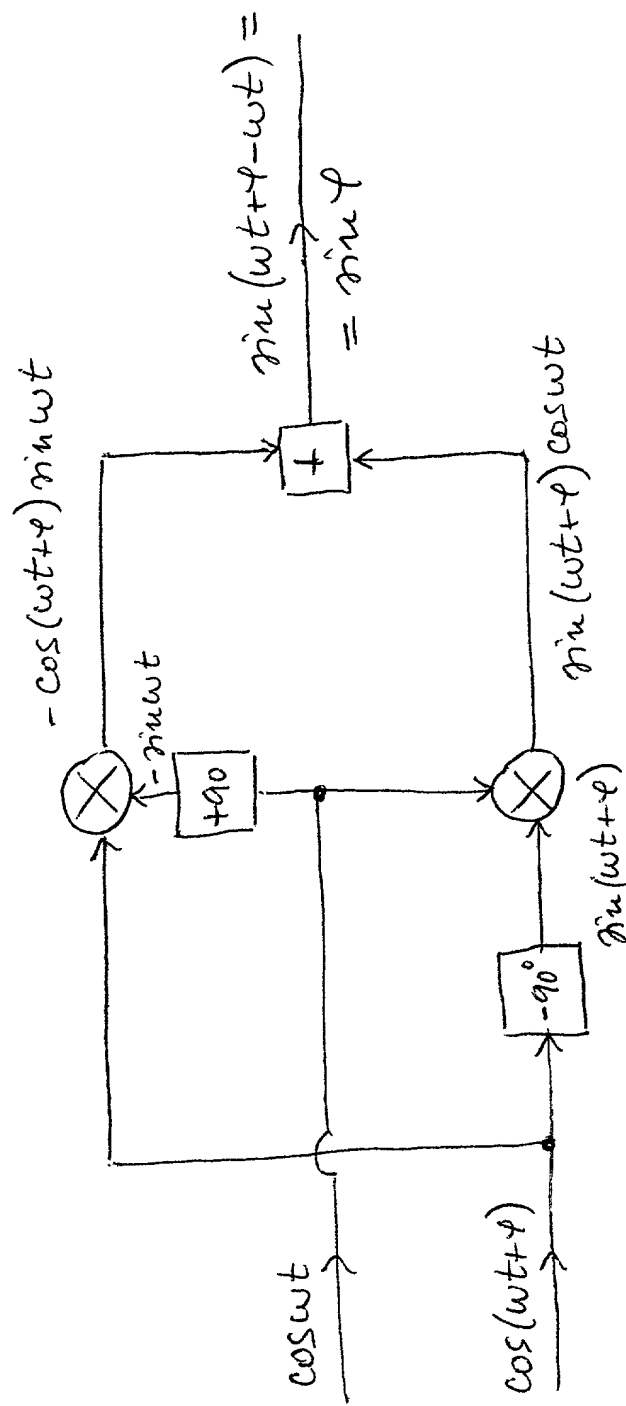


FIG. 11 PHASE DETECTOR EMPLOYING SSB MIXING

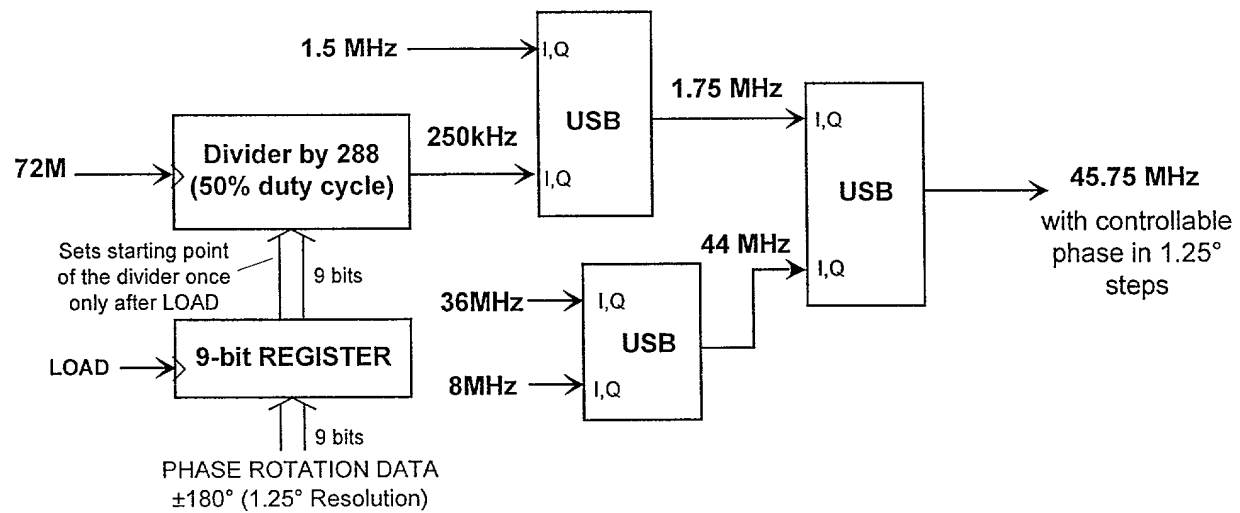


Figure 12 - Generation of 45.75MHz derived from 72 MHz, with controllable phase in $(360^\circ/288)=1.25^\circ$ steps